

# ETSI EN 300 328 V2.2.2 (2019-07)

## TEST REPORT

For

### Shenzhen Sonoff Technologies Co.,Ltd.

3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

**Tested Models: M5-3C-80, M5-2C-80, M5-1C-80**  
**Multiple Models: M5-1C-80W, M5-2C-80W,**  
**M5-3C-80W, M5-1C-80G, M5-2C-80G, M5-3C-80G**

<b>Report Type:</b> Amended Report	<b>Product Type:</b> SONOFF SwitchMan Smart Wall Switch
<b>Report Number:</b>	DG1220704-29964E-22AA1
<b>Report Date:</b>	2022-07-11
<b>Reviewed By:</b>	Rocky Xiao RF Engineer
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**TABLE OF CONTENTS**

**DOCUMENT REVISION HISTORY..... 3**

    DECLARATIONS ..... 3

**DECLARATION LETTER ..... 4**

**BELOW IS THE ORIGINAL REPORT ..... 6**

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	DG1210901-45614E-22A	Original Report	2022-01-20
1	DG1220704-29964E-22AA1	Amended Report	2022-07-11

Note: This is the first amended report application which was based on the original report. The differences between them as following:

1. Change the model to **M5-3C-80, M5-2C-80, M5-1C-80, M5-1C-80W, M5-2C-80W, M5-3C-80W, M5-1C-80G, M5-2C-80G, M5-3C-80G**

2. Reduce the size of the product shell(control part), without change the circuit (Please refer to EUT photos).

The change between the previous equipment and the current equipment is stated and guaranteed by the applicant. The difference between them will not affect the test results, we will keep the test results, test photos, but updated the related EUT photos.

### Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol“▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

**DECLARATION LETTER**

Shenzhen Sonoff Technologies Co.,Ltd.

Add: 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Tel: 0755-27955416 Fax: 0755-27955416

E-mail: cert@itead.cc

**DECLARATION OF SIMILARITY**

Date: 2022-07-04

To Whom It May Concern

Dear Sir or Madam:

We, Shenzhen Sonoff Technologies Co.,Ltd., hereby declare that product: SONOFF SwitchMan Smart Wall Switch, The model M5-1C-80W, M5-2C-80W, M5-3C-80W, M5-1C-80G, M5-2C-80G, M5-3C-80G are electrically identical with the model: M5-1C-80, M5-2C-80, M5-3C-80 which was tested by BACL(Dongguan) with the same electromagnetic emissions and electromagnetic compatibility characteristics.

The following is a description of the differences and declaration similarities between several configurations.

Model	Color	Relay	Gang(s)	PCB Board	
				Power supply board	RF&Control Board
M5-3C-80	black	Relay 1#	three	Different from 2C	Same (The RF part of the 3C series model is the same as the 2C series and 1C series models, but the PCBA of the control board is different.)
M5-3C-80W	white	Relay 2#			
M5-3C-80G	golden	Relay 3#			
M5-2C-80	black	Relay 4# Relay 5#	two	/	
M5-2C-80W	white				
M5-2C-80G	golden				
M5-1C-80	black	Relay 4# Relay 5#	one	Same as 2C	
M5-1C-80W	white				
M5-1C-80G	golden				

The difference of the relay is described as follows:

Components	Manufacturer	Type/Model	Technical Data
Relay 1#	Shenzhen Golden Electrical Appliance Co Ltd.	Y5-1A -5DH 5DH	5A 250VAC
Relay 2#	Zhejiang Fanhar Electronics Co., Ltd.	W18-1AST-DC5V	DC5V 5A 250VAC
Relay 3#	SUZHOUEEKO ELECTRICAPPLIANCES CO.,LTD	GK101-1AS-DC5V	5A 250 VAC
Relay 4#	Shenzhen Golden Electrical Appliance Co Ltd.	GI-1A-5LH	DC5V 10A 250VAC

Relay 5#	Zhejiang Fanhar Electronics Co., Ltd.	W11-1A2STLE-H-DC5V	DC5V 10A 250VAC
----------	---------------------------------------	--------------------	-----------------

Except the differences above, we declare the products are electrically identical. We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing.

Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature *Stan Li*

Name: Stan Lee

Hardware Department Manager

**BELOW IS THE ORIGINAL REPORT**

## ETSI EN 300 328 V2.2.2 (2019-07)


### TEST REPORT

For

**Shenzhen Sonoff Technologies Co.,Ltd.**

3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

**Tested Models: M5-3C-86, M5-2C-86, M5-1C-86**  
**Multiple Models: M5-1C-86W, M5-2C-86W,**  
**M5-3C-86W, M5-1C-86G, M5-2C-86G, M5-3C-86G**

<b>Report Type:</b> Original Report	<b>Product Type:</b> SONOFF SwitchMan Smart Wall Switch
<b>Report Number:</b>	DG1210901-45614E-22A
<b>Report Date:</b>	2022-01-20
<b>Reviewed By:</b>	Rocky Xiao RF Engineer 
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## **TABLE OF CONTENTS**

<b>General Information.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
TECHNICAL SPECIFICATION .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	4
DECLARATIONS.....	5
<b>System Test Configuration .....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
SUPPORT CABLE LIST AND DETAILS.....	7
TEST EQUIPMENT LIST.....	8
ENVIRONMENTAL CONDITIONS .....	8
<b>Summary of Test Results.....</b>	<b>9</b>
<b>1 – RF output power.....</b>	<b>10</b>
APPLICABLE STANDARD.....	10
LIMIT.....	10
TEST PROCEDURE .....	10
TEST DATA.....	11
<b>2 – Power Spectral Density .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
LIMIT.....	12
TEST PROCEDURE .....	12
TEST DATA.....	13
<b>6 – Occupied Channel Bandwidth .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
LIMIT.....	16
TEST PROCEDURE .....	16
TEST DATA.....	16
<b>7 – Transmitter unwanted emissions in the out-of-band domain .....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
LIMIT.....	18
TEST PROCEDURE .....	18
TEST DATA.....	18
<b>8 – Transmitter unwanted emissions in the spurious domain.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
LIMIT.....	19
TEST PROCEDURE .....	19
TEST DATA.....	20
<b>9 – Receiver spurious emissions .....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
LIMIT.....	21
TEST PROCEDURE .....	21
TEST DATA.....	22
<b>10 – Receiver Blocking .....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
LIMIT.....	23
TEST SETUP BLOCK DIAGRAM .....	24
TEST PROCEDURE .....	24
TEST DATA.....	24



<b>EXHIBIT A - E.2 Information as required by EN 300 328 V2.2.2,clause 5.4.1 .....</b>	<b>25</b>
<b>ExhibitB – Eut Photographs.....</b>	<b>30</b>
<b>ExhibitC – Test Setup Photographs .....</b>	<b>31</b>
RADIATED EMISSIONS.....	31

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	SONOFF SwitchMan Smart Wall Switch
<b>Tested Models:</b>	M5-3C-86, M5-2C-86, M5-1C-86
<b>Multiple Models:</b>	M5-1C-86W, M5-2C-86W, M5-3C-86W, M5-1C-86G, M5-2C-86G, M5-3C-86G
<b>Model Difference:</b>	Refer to DOS
<b>Rated Input Voltage:</b>	AC230V
<b>Serial Number:</b>	M5-3C-86: DG1210901-45614E-RF-S2 M5-2C-86: DG1210901-45614E-RF-S3 M5-1C-86: DG1210901-45614E-RF-S4
<b>EUT Received Date:</b>	2021-09-02
<b>EUT Received Status:</b>	Good

### Technical Specification

<b>Operation Frequency Range (MHz):</b>	2402-2480
<b>Max. RF Output Power (Conducted) (dBm):</b>	0.31
<b>Antenna Gain (dBi)<sup>▲</sup>:</b>	0
<b>Modulation Type:</b>	GFSK

### Objective

This report is prepared on behalf of *Shenzhen Sonoff Technologies Co., Ltd.* in accordance with ETSI EN 300 328 V2.2.2 (2019-07) Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum.

The objective is to determine the compliance of EUT with: ETSI EN 300 328 V2.2.2 (2019-07).

### Test Methodology

All measurements contained in this report were conducted with ETSI EN 300 328 V2.2.2 (2019-07).

### Measurement Uncertainty

Parameter	Flab	Maximum allow uncertainty
Occupied Channel Bandwidth	±5 %	±5 %
RF output power, conducted	±0.61dB	±1,5 dB
Power Spectral Density, conducted	±3 dB	±3 dB
Unwanted Emissions, conducted	±2.47dB	±3 dB
All emissions, radiated	±3.62dB	±6 dB
Temperature	±1 °C	±3 °C
Supply voltages	±0.4%	±3 %
Time	1%	±5 %

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

**Declarations**

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.  
For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	...	...
...	...	...	...
...	...	...	...
...	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

The extreme temperature test conditions which were declared by the manufacturer and the normal conditions are as below:

NT: Normal Temperature 25°C

LT: Low Temperature -10°C


HT: High Temperature 40°C

The models: M5-3C-86, M5-2C-86 and M5-1C-86 share the same RF circuit structure and software setting, pre-test the three models for output power, M5-3C-86 with highest power was selected for full test.

### EUT Exercise Software

Software and version      espRFTTool.exe

Mode	Channel	Frequency (MHz)	Data rate (Mbps)	Power level
LE 1M	Low	2402	1	4
	Middle	2440	1	4
	High	2480	1	4

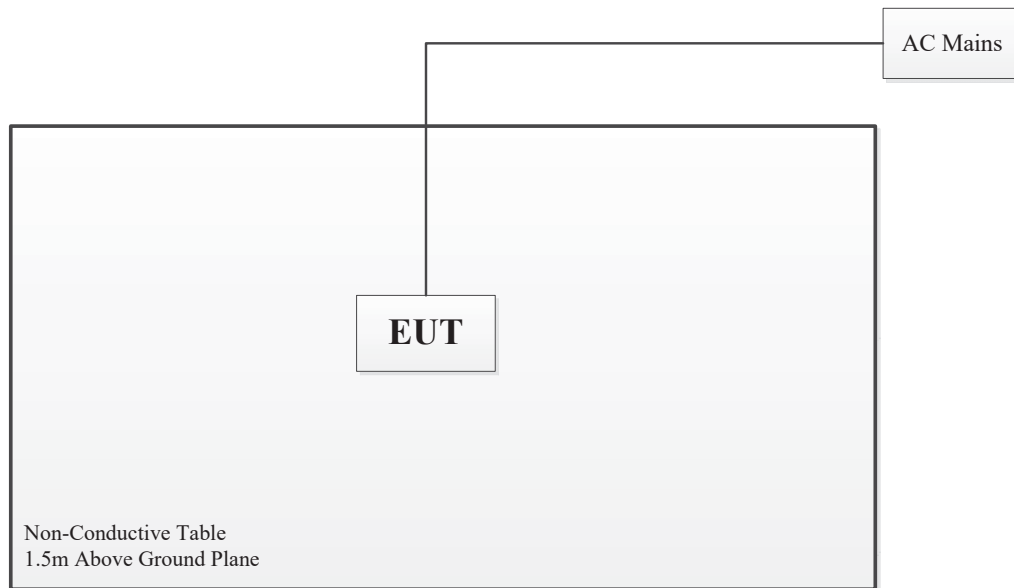**Block Diagram of Test Setup****Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
/	/	/	/

**Support Cable List and Details**

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

**Test Equipment List**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emissions below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-23	2021-09-22
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2021-07-19	2022-07-18
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2021-07-19	2022-07-18
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2021-07-19	2022-07-18
Sonoma	Amplifier	310N	372193	2021-07-18	2022-07-17
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2021-09-04	2022-09-03
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
Radiated emissions above 1 GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Agilent	Spectrum Analyzer	E4440A	SG43360054	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2021-09-04	2022-09-03
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2021-09-04	2022-09-03
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2021-09-04	2022-09-03
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2021-06-16	2022-06-15
RF conducted					
R&S	Spectrum Analyzer	FSU 26	200160/026	2021-04-25	2022-04-24
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	2021-09-04	2022-09-03
Agilent	USB Wideband Power Sensor	U2021XA	MY54080014	2021-07-22	2022-07-21
R&S	Wideband Radio Communication Tester	CMW500	147473	2020-09-23	2021-09-22
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2021-02-24	2022-02-23
narda	Attenuator	6dB	04270	2021-09-04	2022-09-03
Agilent	MXG Vector Signal Generator	N5182B	MY51350142	2021-04-25	2022-04-24

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Environmental Conditions**

Test Item:	Radiated emissions	RF conducted
Temperature:	23.7~27.5°C	26.2°C
Relative Humidity:	60~66%	63%
ATM Pressure:	100.3kPa	100.3kPa
Tester:	Alex Hu, Joker Chen	Rennes Guo
Test Date:	2021.09.08~2021.09.13	2021.09.08

**SUMMARY OF TEST RESULTS**

SN	Rule and Clause	Description of Test	Test Result
1	EN 300 328 Clause 4.3.2.2	RF output power	Compliance
2	EN 300 328 Clause 4.3.2.3	Power Spectral Density	Compliance
3	EN 300 328 Clause 4.3.2.4	Duty cycle, Tx-Sequence, Tx-gap	Not applicable*
4	EN 300 328 Clause 4.3.2.5	Medium Utilisation (MU) factor	Not applicable*
5	EN 300 328 Clause 4.3.2.6	Adaptivity	Not applicable**
6	EN 300 328 Clause 4.3.2.7	Occupied Channel Bandwidth	Compliance
7	EN 300 328 Clause 4.3.2.8	Transmitter unwanted emissions in the out-of-band domain	Compliance
8	EN 300 328 Clause 4.3.2.9	Transmitter unwanted emissions in the spurious domain	Compliance
9	EN 300 328 Clause 4.3.2.10	Receiver spurious emissions	Compliance
10	EN 300 328 Clause 4.3.2.11	Receiver Blocking	Compliance
11	EN 300 328 Clause 4.3.2.12	Geo-location capability	Not applicable***

Note:

The applicant declared that the equipment is adaptive equipment.

Not applicable\*: The test is not applicable for adaptive equipment.

Not applicable\*\*: The test is not applicable for adaptive equipment output power less than 10mW.

Not applicable\*\*\*: The manufacturer declared the device without Geo-location capability.

---

## 1 – RF OUTPUT POWER

---

### Applicable Standard

This requirement applies to all types of equipment using wide band modulations other than FHSS.

The RF output power is defined as the mean equivalent isotropic radiated power (e.i.r.p.) of the equipment during a transmission burst.

### Limit

For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.4.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

### Test Procedure

The test procedure shall be as follows:

#### Step 1:

- Use a fast power sensor suitable for 2,4 GHz and capable of minimum 1 MS/s.
  - Use the following settings:
    - Sample speed 1 MS/s or faster.
    - The samples shall represent the RMS power of the signal.
    - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.
- For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

#### Step 2:

- For conducted measurements on devices with one transmit chain:
  - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
  - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
  - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
  - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps.



**Step 3:**

- Find the start and stop times of each burst in the stored measurement samples.

The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.

In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

**Step 4:**

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. The start and stop points shall be included. Save these  $P_{burst}$  values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

**Step 5:**

- The highest of all  $P_{burst}$  values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

**Step 6:**

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beam forming gain "Y" in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below:

$$P = A + G + Y$$

- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

**Test Data**

Please refer to following table:

Mode	Channel	Conducted output power (dBm)			Result (dBm)			Limit (dBm)
		LT	NT	HT	LT	NT	HT	
LE 1M	Low	-0.33	-0.4	-0.36	-0.33	-0.4	-0.36	20
	Middle	-0.15	-0.16	-0.11	-0.15	-0.16	-0.11	
	High	0.31	0.28	0.25	0.31	0.28	0.25	

Note: The antenna gain was added into the test result.

---

## 2 – POWER SPECTRAL DENSITY

---

### Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07) §4.3.2.3.2, this requirement applies to all types of equipment using wide band modulations other than FHSS.

The Power Spectral Density is the mean equivalent isotropically radiated power (e.i.r.p.) spectral density in a 1 MHz bandwidth during a transmission burst.

### Limit

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

### Test Procedure

The transmitter shall be connected to a spectrum analyser and the Power Spectral Density as defined in clause 4.3.2.3 shall be measured and recorded.

The test procedure shall be as follows:

#### Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483.5 MHz
- Resolution BW: 10 kHz
- Video BW: 30 kHz
- Sweep Points: > 8 350; for spectrum analysers not supporting this number of sweep points, the frequency band may be segmented

NOTE: For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.

- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: For non-continuous transmissions:  $2 \times \text{Channel Occupancy Time} \times \text{number of sweep points}$   
For continuous transmissions: 10 s; the sweep time may be increased further until a value where the sweep time has no impact on the RMS value of the signal.

For non-continuous signals, wait for the trace to stabilize. Save the data (trace data) set to a file.

#### Step 2:

For conducted measurements on smart antenna systems using either operating mode 2 or operating mode 3 (see clause 5.3.2.2), repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains and use this as the new data set.

**Step 3:**

Add up the values for power for all the samples in the file using the formula below.

$$P_{Sum} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

**Step 4:**

Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.3.2 and save the corrected data. The following formulas can be used:

$$C_{Corr} = P_{Sum} - P_{e.i.r.p}$$

$$P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$$

with 'n' being the actual sample number

**Step 5:**

Starting from the first sample  $P_{Samplecorr}(n)$  (lowest frequency), add up the power (in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

**Step 6:**

Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to sample #101).

**Step 7:**

Repeat step 6 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments.

From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.

**Test Data**


Please refer to following table:

Mode	Channel	Reading Density (dBm/MHz)	EIRP Density (dBm/MHz)	Limit (dBm/MHz)
LE 1M	Low	-0.45	-0.45	10
	Middle	-0.21	-0.21	
	High	0.23	0.23	


Note: The antenna gain was added into the test result.

Please refer to following plots:


Low

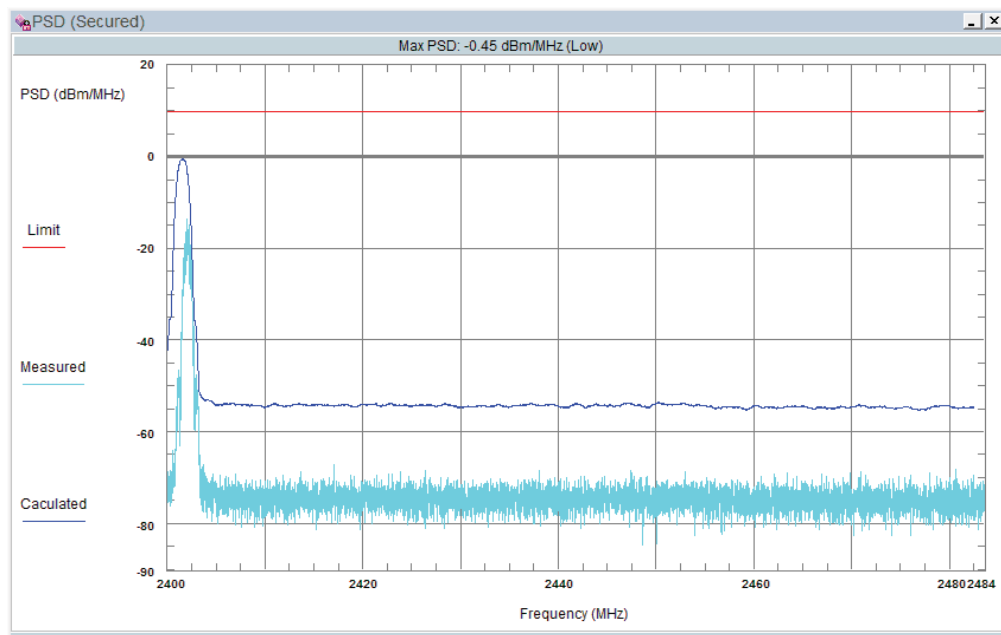

Middle

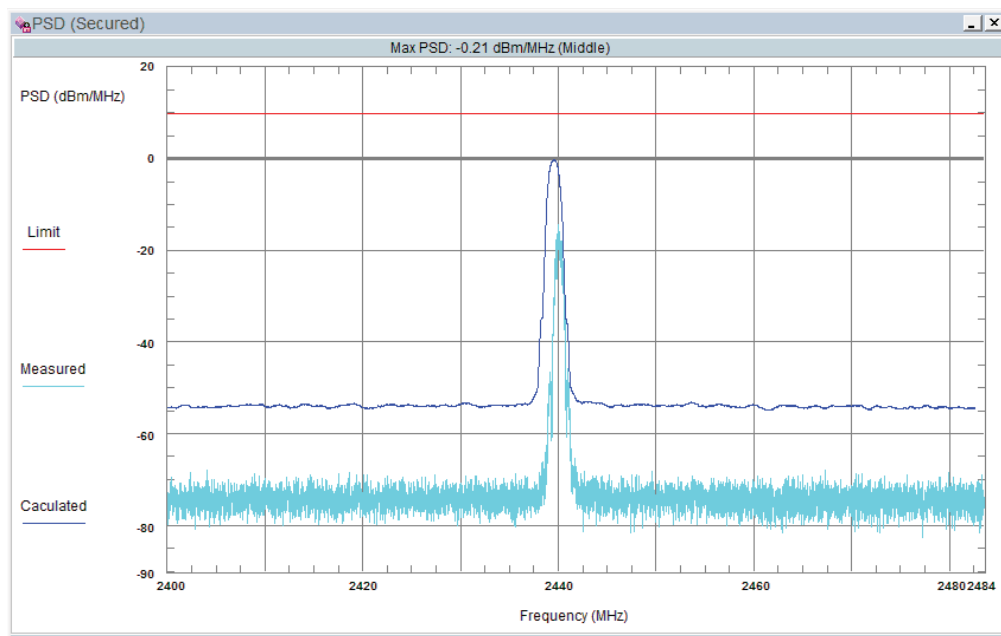

High

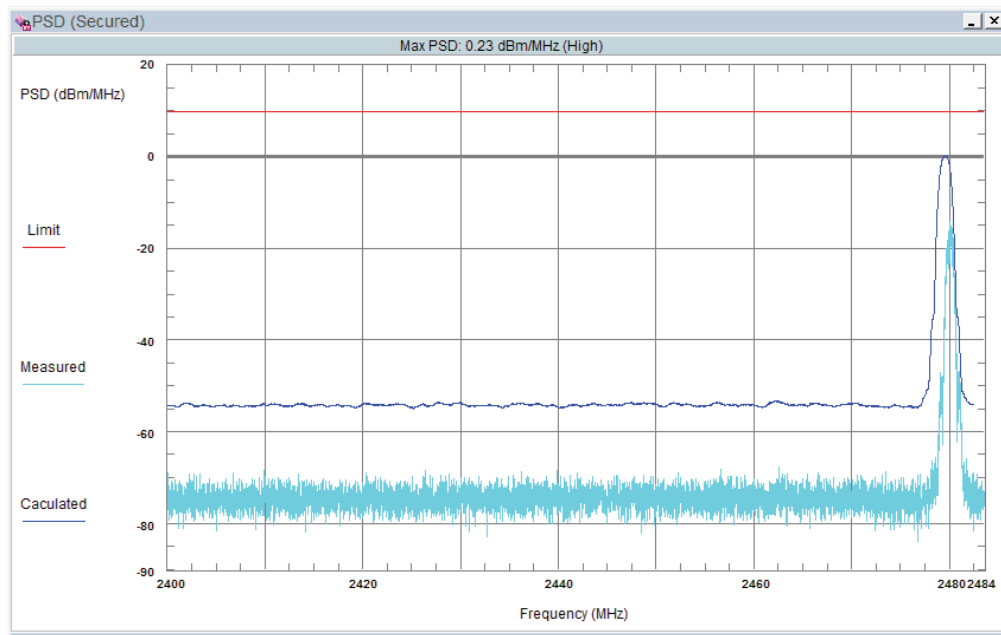

## 6 – OCCUPIED CHANNEL BANDWIDTH

### Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07)§4.3.2.7.2, the occupied channel bandwidth is the bandwidth that contains 99 % of the power of the signal.

### Limit

The Occupied Channel Bandwidth shall fall completely within the band given in clause 1.  
In addition, for non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

### Test Procedure

The measurement procedure shall be as follows:

#### Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW:  $3 \times \text{RBW}$
- Frequency Span for other types of equipment:  $2 \times \text{Nominal Channel Bandwidth}$
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

#### Step 2:

Wait for the trace to stabilize.

Find the peak value of the trace and place the analyser marker on this peak.

#### Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

NOTE: Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.


### Test Data

Please refer to following table:

Mode	Channel	Frequency (MHz)	Result (MHz)
LE 1M	Low	2402	1.016
	High	2480	1.016


Please refer to following plots:

### Low

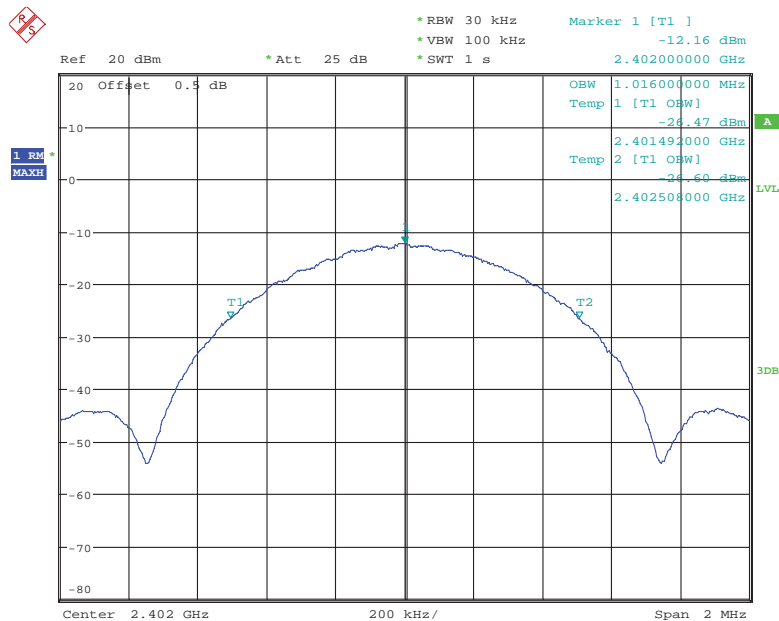

Date: 8.SEP.2021 16:21:31

### High

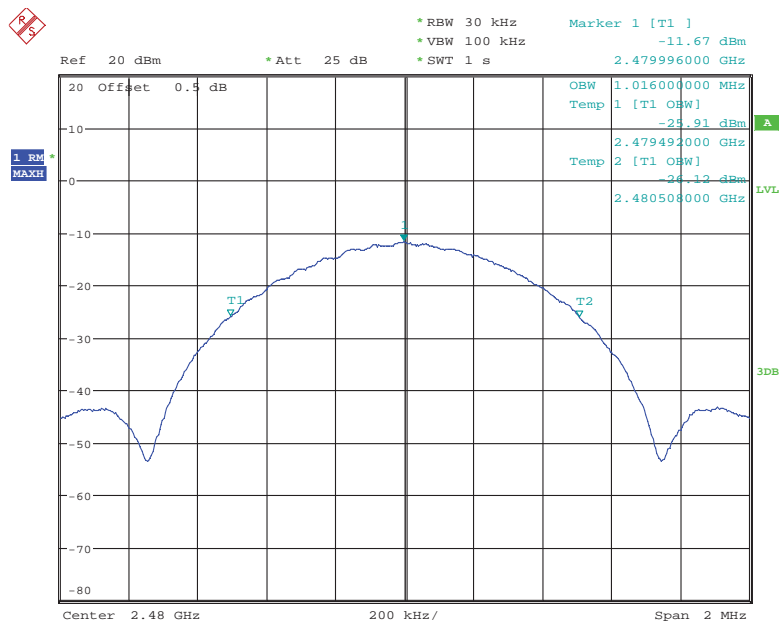

Date: 8.SEP.2021 16:22:59

## 7 – TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

### Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07) §4.3.2.8.2, Transmitter unwanted emissions in the out-of-band domain are emissions when the equipment is in Transmit mode, on frequencies immediately outside the necessary bandwidth which results from the modulation process, but excluding spurious emissions.

### Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.

Within the 2 400 MHz to 2 483,5 MHz band, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement in clause 4.3.2.7.

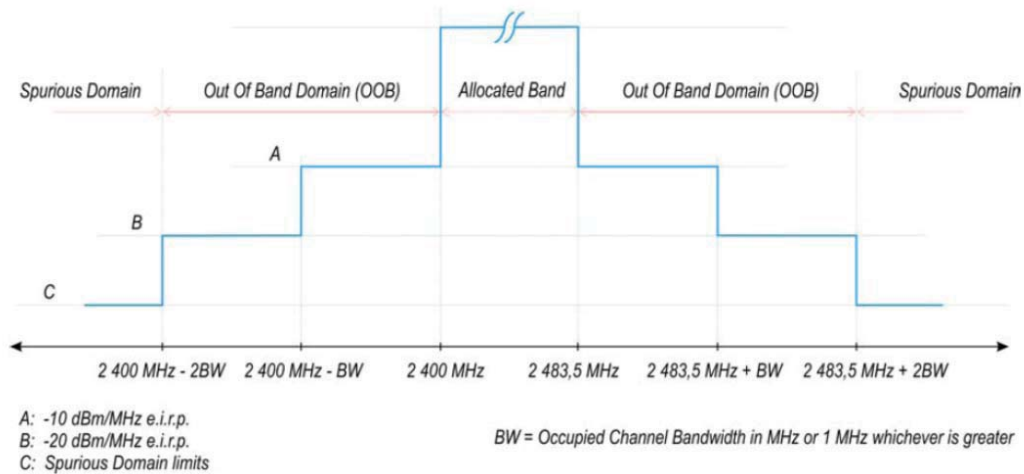


Figure 3: Transmit mask

### Test Procedure

According to ETSI EN 300 328 V2.2.2 (2019-07) §5.4.8.2

### Test Data

Please refer to following table:

Mode	Channel	Frequency Segment	Reading (dBm/MHz)	Result (dBm/MHz)	Limit (dBm/MHz)
LE 1M	Low	2400MHz-2BW~2400-BW	-56.37	-56.37	-20
		2400MHz-BW~2400MHz	-54.35	-54.35	-10
	High	2483.5MHz~2483.5MHz+BW	-56.40	-56.4	-10
		2483.5MHz+BW~2483.5MHz+2BW	-57.15	-57.15	-20

Note: The antenna gain was added into the test result.



**8 – TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN****Applicable Standard**

Transmitter unwanted emissions in the spurious domain are emissions outside the allocated band and outside the Out-of-band Domain as indicated in figure 3 when the equipment is in Transmit mode.

**Limit**

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in the following table. In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

**Transmitter limits for spurious emissions**

Frequency Range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

**Test Procedure**

According to ETSI EN 300 328 V2.2.2 (2019-07) §5.4.9.2

**Test Data**

Pre-scan test model M5-3C-86, M5-2C-86, M5-1C-86, the test result was similar, the worst case please refer to following table:

**BLE 1M\_low channel(M5-3C-86)****2402 MHz**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4804.00	H	44.79	-49.54	10.96	1.44	-40.02	-30.00	10.02
4804.00	V	41.86	-52.29	10.96	1.44	-42.77	-30.00	12.77
7206.00	H	35.75	-54.07	11.08	1.93	-44.92	-30.00	14.92
7206.00	V	35.47	-54.53	11.08	1.93	-45.38	-30.00	15.38
2538.40	H	43.05	-57.29	9.46	1.01	-48.84	-30.00	18.84
2523.90	V	41.31	-59.14	9.44	1.01	-50.71	-30.00	20.71
57.40	H	50.69	-52.41	-11.50	0.14	-64.05	-54.00	10.05
57.40	V	53.88	-50.89	-11.50	0.14	-62.53	-54.00	8.53

**BLE 1M\_high channel(M5-3C-86)****2480 MHz**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4960.00	H	43.23	-49.98	11.15	1.50	-40.33	-30.00	10.33
4960.00	V	42.05	-51.12	11.15	1.50	-41.47	-30.00	11.47
7440.00	H	35.01	-54.91	10.94	1.98	-45.95	-30.00	15.95
7440.00	V	35.04	-55.53	10.94	1.98	-46.57	-30.00	16.57
2529.70	H	43.92	-56.49	9.45	1.01	-48.05	-30.00	18.05
2552.80	V	40.68	-59.48	9.48	1.01	-51.01	-30.00	21.01
57.40	H	51.35	-51.75	-11.50	0.14	-63.39	-54.00	9.39
57.40	V	52.60	-52.17	-11.50	0.14	-63.81	-54.00	9.81

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

## 9 – RECEIVER SPURIOUS EMISSIONS

### Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07) §4.3.2.10, the receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

### Limit

The spurious emissions of the receiver shall not exceed the values given in the following table. In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or for emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Frequency Range	Maximum power	Measurement Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47dBm	1 MHz

### Test Procedure

According to ETSI EN 300 328 V2.2.2 (2019-07) §5.4.10.2

**Test Data**

Pre-scan test model M5-3C-86, M5-2C-86, M5-1C-86, the test result was similar, the worst case please refer to following table:

**BLE 1M\_low channel (M5-3C-86)****2402 MHz**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
3208.00	H	36.13	-60.52	10.28	1.12	-51.36	-47.00	4.36
3208.00	V	35.71	-60.69	10.28	1.12	-51.53	-47.00	4.53
57.40	H	49.59	-53.51	-11.50	0.14	-65.15	-57.00	8.15
57.40	V	44.92	-59.85	-11.50	0.14	-71.49	-57.00	14.49

**BLE 1M\_high channel (M5-3C-86)****2480 MHz**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
3309.30	H	35.93	-60.22	10.32	1.15	-51.05	-47.00	4.05
3309.30	V	35.69	-60.24	10.32	1.15	-51.07	-47.00	4.07
57.40	H	50.66	-52.44	-11.50	0.14	-64.08	-57.00	7.08
57.40	V	47.13	-57.64	-11.50	0.14	-69.28	-57.00	12.28

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

## 10 – RECEIVER BLOCKING

### Applicable Standard

This requirement applies to all receiver categories as defined in clause 4.2.3.

### Limit

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 14, table 15 or table 16.

**Table 14: Receiver Blocking parameters for Receiver Category 1 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or $-68 \text{ dBm}$ whichever is less (see note 2)	2 380 2 504	-34	CW
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or $-74 \text{ dBm}$ whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			


**Table 15: Receiver Blocking parameters receiver Category 2 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

**Table 16: Receiver Blocking parameters receiver Category 3 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to <math>P_{\min} + 30 \text{ dB}</math> where <math>P_{\min}</math> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

### Test Setup Block Diagram

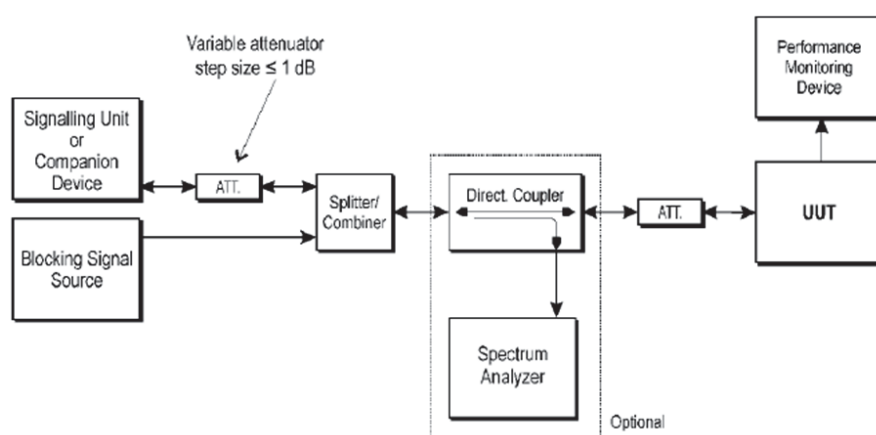**Figure 6: Test Set-up for receiver blocking**

### Test Procedure

The measurement procedure refer to ETSI EN 300 328 V2.2.2 (2019-07) §5.4.11

### Test Data

Please refer to following table:

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Blocking Signal Frequency (MHz)	PER (%)	Limit (%)
BLE	Low	2402	1	2380	1.23	≤10
				2300	1.25	
	High	2480	1	2504	1.27	≤10
				2584	1.35	

Note: EIRP is lower than 10dBm and higher than 0dBm, and it is adaptive device, so it is belong to category 2.

---

**EXHIBIT A - E.2 INFORMATION AS REQUIRED BY EN 300 328**  
**V2.2.2, CLAUSE 5.4.1**

---

In accordance with EN 300 328, clause 5.4.1, the following information is provided by the supplier.

**a) The type of modulation used by the equipment:**

- ☐ FHSS  
☒ other forms of modulation

**b) In case of FHSS modulation:**

In case of non-Adaptive Frequency Hopping equipment:  
The number of Hopping Frequencies:.

In case of Adaptive Frequency Hopping Equipment:  
The maximum number of Hopping Frequencies;;  
The minimum number of Hopping Frequencies: ;

The (average) Dwell Time;;

**c) Adaptive / non-adaptive equipment:**

- ☐ non-adaptive Equipment  
☒ adaptive Equipment without the possibility to switch to a non-adaptive mode  
☐ adaptive Equipment which can also operate in a non-adaptive mode

**d) In case of adaptive equipment:**

The Channel Occupancy Time implemented by the equipment: ms

- ☐ The equipment has implemented an LBT based DAA mechanism

In case of equipment using modulation different from FHSS:

- ☐ The equipment is Frame Based equipment  
☒ The equipment is Load Based equipment  
☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment:  $\mu$ s

- ☐ The equipment has implemented an non-LBT based DAA mechanism  
☐ The equipment can operate in more than one adaptive mode

**e) In case of non-adaptive Equipment:**

The maximum RF Output Power (e.i.r.p.):dBm  
The maximum (corresponding) Duty Cycle: %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

**f) The worst case operational mode for each of the following tests:**

RF Output Power: 0.31 dBm;  
 Power Spectral Density 0.23 dBm/MHz;  
 Duty cycle, Tx-Sequence, Tx-gap N/A;  
 Accumulated Transmit Time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)  
N/A;  
 Hopping Frequency Separation (only for FHSS equipment) N/A;  
 Medium Utilisation N/A;  
 Adaptivity N/A;  
 Receiver Blocking Pass;  
 Nominal Occupied Channel Bandwidth 1MHz;  
 Transmitter unwanted emissions in the OOB domain -56.37dBm/MHz;  
 Transmitter unwanted emissions in the spurious domain -62.53dBm;  
 Receiver spurious emissions -51.05dBm;

**g) The different transmit operating modes (tick all that apply):**

- ☒ Operating mode 1: Single Antenna Equipment  
☒ Equipment with only 1 antenna  
☐ Equipment with 2 diversity antennas but only 1 antenna active at any moment in time  
☐ Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)  
  
☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming  
☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)  
☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1  
☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2  
 Note: Add more lines if more channel bandwidths are supported.  
  
☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming  
☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)  
☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1  
☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2  
 Note: Add more lines if more channel bandwidths are supported.

**h) In case of Smart Antenna Systems:**

The number of Receive chains;;  
 The number of Transmit chains;;

- ☐ symmetrical power distribution  
☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain;;

Note: Beam forming gain does not include the basic gain of a single antenna.

**i) Operating Frequency Range(s) of the equipment:**

Operating Frequency Range 1: 2402 MHz to 2480 MHz  
 Operating Frequency Range 2:     MHz to     MHz

Note: Add more lines if more Frequency Ranges are supported.



**j) Nominal Channel Bandwidth(s):**Nominal Channel Bandwidth 1: 1 MHz

Nominal Channel Bandwidth 2: \_\_\_\_\_ MHz

Note: Add more lines if more channel bandwidths are supported.

**k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):**

- ☒ Stand-alone  
☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)  
☐ Plug-in radio device (Equipment intended for a variety of host systems)  
☐ Other ;

**l) The normal and the extreme operating conditions that apply to the equipment:****Normal operating conditions (if applicable):**Operating temperature range: +25 ° C

Other (please specify if applicable): \_\_\_\_\_

**Extreme operating conditions:**Operating temperature range: Minimum: -10 ° C Maximum +40 ° C

Other (please specify if applicable): \_\_\_\_\_ Minimum: \_\_\_\_\_ Maximum \_\_\_\_\_

Details provided are for the: ☒ stand-alone equipment  
☐ combined (or host) equipment  
☐ test jig

**m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:**

Antenna Type:

- ☒ Integral Antenna (information to be provided in case of conducted measurements)

Antenna Gain: 0 dBi

If applicable, additional beam forming gain (excluding basic antenna gain): dB

- ☐ Temporary RF connector provided  
☐ No temporary RF connector provided
- ☐ Dedicated Antennas (equipment with antenna connector)  
☐ Single power level with corresponding antenna(s)  
☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels:;

Power Level 1: dBm

Power Level 2: dBm

Power Level 3: dBm

Note 1: Add more lines in case the equipment has more power levels.

Note 2: These power levels are conducted power levels (at antenna connector).

For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beam forming gain (Y) if applicable

Power Level 1: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Note 3: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Note 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Note 5: Add more rows in case more antenna assemblies are supported for this power level.

**n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:**

Details provided are for the: ☒ stand-alone equipment  
☐ combined (or host) equipment  
☐ test jig

Supply Voltage ☒ AC mains State AC voltage 230 V  
☐ DC State DC voltage \_\_\_\_\_ V

In case of DC, indicate the type of power source

- ☐ Internal Power Supply  
☐ External Power Supply or AC/DC adapter  
☐ Battery  
☐ Other: \_\_\_\_\_.

**o) Describe the test modes available which can facilitate testing:**

The measurements shall be performed during continuously transmitting.

**p) The equipment type (e.g. Bluetooth®, IEEE 802.11™, IEEE 802.15.4™, proprietary, etc.):**

Bluetooth®.

**q) If applicable, the statistical analysis referred to in clause 5.4.1 q)**

(to be provided as separate attachment)

**r) If applicable, the statistical analysis referred to in clause 5.4.1 r)**

(to be provided as separate attachment)

**s) Geo-location capability supported by the equipment:**

- ☐ Yes  
☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.  
☒ No

---

**EXHIBITB – EUT PHOTOGRAPHS**

---

For photos in this section, please refer to report No.: DG1210901-45614E-02 EXHIBIT A.


## EXHIBITC – TEST SETUP PHOTOGRAPHS

### Radiated Emissions

Radiated Emissions Below 1GHz View



Radiated Emissions Above 1GHz View

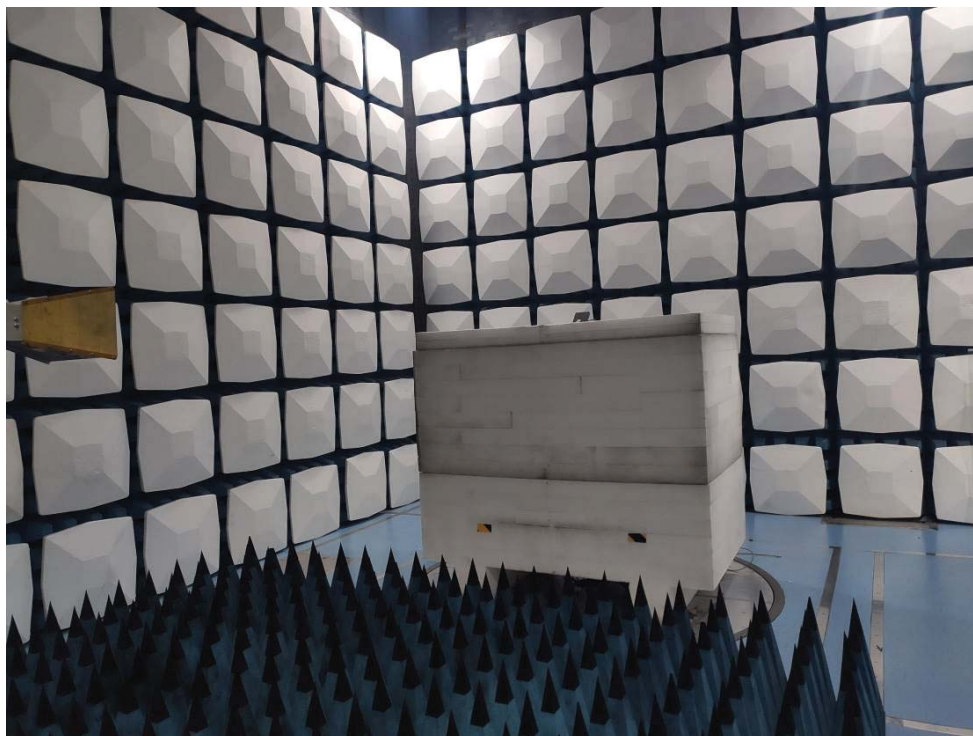

\*\*\*\*\*END OF REPORT\*\*\*\*\*