

ETSI EN 300328 V2.2.2 (2019-07)
TEST REPORT

For

Shenzhen Sonoff Technologies Co.,Ltd.

3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Tested Models: M5-3C-80, M5-2C-80, M5-1C-80
Multiple Models: M5-1C-80W, M5-2C-80W,
M5-3C-80W, M5-1C-80G, M5-2C-80G, M5-3C-80G

Report Type: Amended Report	Product Type: SONOFF SwitchMan Smart Wall Switch
Report Number: DG1220704-29964E-22BA1	
Report Date: 2022-07-11	
Reviewed By:	Rocky Xiao RF Engineer
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY3
 DECLARATIONS.....3
DECLARATION LETTER4
BELOW IS THE ORIGINAL REPORT6

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	DG1210901-45614E-22B	Original Report	2022-01-20
1	DG1220704-29964E-22BA1	Amended Report	2022-07-11

Note: This is the first amended report application which was based on the original report. The differences between them as following:

1. Change the model to **M5-3C-80, M5-2C-80, M5-1C-80, M5-1C-80W, M5-2C-80W, M5-3C-80W, M5-1C-80G, M5-2C-80G, M5-3C-80G**
2. Reduce the size of the product shell(control part), without change the circuit (Please refer to EUT photos).

The change between the previous equipment and the current equipment is stated and guaranteed by the applicant. The difference between them will not affect the test results, we will keep the test results, test photos, but updated the related EUT photos.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol“▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

DECLARATION LETTER

Shenzhen Sonoff Technologies Co.,Ltd.

Add: 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Tel: 0755-27955416 Fax: 0755-27955416

E-mail: cert@itead.cc

DECLARATION OF SIMILARITY

Date: 2022-07-04

To Whom It May Concern

Dear Sir or Madam:

We, Shenzhen Sonoff Technologies Co.,Ltd., hereby declare that product: SONOFF SwitchMan Smart Wall Switch, The model M5-1C-80W, M5-2C-80W,M5-3C-80W, M5-1C-80G, M5-2C-80G, M5-3C-80G are electrically identical with the model: M5-1C-80 ,M5-2C-80 ,M5-3C-80 which was tested by BACL(Dongguan) with the same electromagnetic emissions and electromagnetic compatibility characteristics.

The following is a description of the differences and declaration similarities between several configurations.

Model	Color	Relay	Gang(s)	PCB Board	
				Power supply board	RF&Control Board
M5-3C-80	black	Relay 1#	three	Different from 2C	Same (The RF part of the 3C series model is the same as the 2C series and 1C series models, but the PCBA of the control board is different.)
M5-3C-80W	white	Relay 2#			
M5-3C-80G	golden	Relay 3#			
M5-2C-80	black	Relay 4# Relay 5#	two	/	
M5-2C-80W	white				
M5-2C-80G	golden				
M5-1C-80	black	Relay 4# Relay 5#	one	Same as 2C	
M5-1C-80W	white				
M5-1C-80G	golden				

The difference of the relay is described as follows:

Components	Manufacturer	Type/Model	Technical Data
Relay 1#	Shenzhen Golden Electrical Appliance Co Ltd.	Y5-1A -5DH 5DH	5A 250VAC
Relay 2#	Zhejiang Fanhar Electronics Co., Ltd.	W18-1AST-DC5V	DC5V 5A 250VAC
Relay 3#	SUZHOU GEEKO ELECTRICAPPLIANCES CO.,LTD	GK101-1AS-DC5V	5A 250 VAC
Relay 4#	Shenzhen Golden Electrical Appliance Co Ltd.	GI-1A-5LH	DC5V 10A 250VAC

Relay 5#	Zhejiang Fanhar Electronics Co., Ltd.	W11-1A2STLE-H-DC5V	DC5V 10A 250VAC
----------	---------------------------------------	--------------------	-----------------

Except the differences above, we declare the products are electrically identical. We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing.

Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature *Stan Li*

Name: Stan Lee

Hardware Department Manager

BELOW IS THE ORIGINAL REPORT

ETSI EN 300328 V2.2.2 (2019-07)
TEST REPORT

For

Shenzhen Sonoff Technologies Co.,Ltd.

3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Tested Models: M5-3C-86, M5-2C-86, M5-1C-86
Multiple Models: M5-1C-86W, M5-2C-86W, M5-3C-86W,
M5-1C-86G, M5-2C-86G, M5-3C-86G


Report Type: Original Report	Product Type: SONOFF SwitchMan Smart Wall Switch
Report Number: DG1210901-45614E-22B	
Report Date: 2022-01-20	
Reviewed By:	Rocky Xiao RF Engineer 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
TECHNICAL SPECIFICATION	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	7
TEST EQUIPMENT LIST	8
ENVIRONMENTAL CONDITIONS.....	8
SUMMARY OF TEST RESULTS.....	9
1 – RF OUTPUT POWER	10
APPLICABLE STANDARD	10
LIMIT	10
TEST PROCEDURE	10
TEST DATA	12
2 - POWER SPECTRAL DENSITY.....	13
APPLICABLE STANDARD	13
LIMIT	13
TEST PROCEDURE	13
TEST DATA	15
5 – Adaptivity	22
APPLICABLE STANDARD	22
TEST SETUP BLOCK DIAGRAM	22
TEST PROCEDURE	22
TEST DATA	23
6 – OCCUPIED CHANNEL BANDWIDTH.....	27
APPLICABLE STANDARD	27
LIMIT	27
TEST PROCEDURE	27
TEST DATA	28
7 – TRANSMITTER UNWANTED EMISSION IN THE OUT-OF-BAND DOMAIN	33
APPLICABLE STANDARD	33
LIMIT	33
TEST PROCEDURE	33
TEST DATA	34
8 – TRANSMITTER UNWANTED EMISSION IN THE SPURIOUS DOMAIN	35
APPLICABLE STANDARD	35
LIMIT	35
TEST PROCEDURE	35
TEST DATA	36

9 – RECEIVER SPURIOUS EMISSIONS	37
APPLICABLE STANDARD	37
LIMIT	37
TEST PROCEDURE	37
TEST DATA	38
10 - RECEIVER BLOCKING.....	39
APPLICABLE STANDARD	39
LIMIT	39
TEST SETUP BLOCK DIAGRAM.....	41
TEST PROCEDURE	41
TEST DATA	41
EXHIBIT A - E.2 INFORMATION AS REQUIRED BY EN 300 328 V2.2.2, CLAUSE 5.4.1	42
EXHIBIT B - EUT PHOTOGRAPHS	47
EXHIBIT C – TEST SETUP PHOTOGRAPHS	48
RADIATED EMISSIONS	48

GENERAL INFORMATION**Product Description for Equipment under Test (EUT)**

EUT Name:	SONOFF SwitchMan Smart Wall Switch
Tested Models:	M5-3C-86, M5-2C-86, M5-1C-86
Multiple Models:	M5-1C-86W, M5-2C-86W, M5-3C-86W, M5-1C-86G, M5-2C-86G, M5-3C-86G
Model Difference:	Refer to DOS
Rated Input Voltage:	AC230V
Serial Number:	M5-3C-86: DG1210901-45614E-RF-S2 M5-2C-86: DG1210901-45614E-RF-S3 M5-1C-86: DG1210901-45614E-RF-S4
EUT Received Date:	2021-09-02
EUT Received Status:	Good

Technical Specification

Operation Frequency Range (MHz):		802.11b/g/n20: 2412-2472 802.11n40: 2422-2462
RF Output Power (EIRP) (dBm):		802.11b: 16.59 802.11g: 14.62 802.11n20: 14.67 802.11n40: 14.32
Number of Chains	Transmit:	1
	Receive:	1
Antenna Gain (dBi)[▲]:		0
Modulation Type:		DSSS, OFDM

Objective

This report is prepared on behalf of *Shenzhen Sonoff Technologies Co.,Ltd.* in accordance with ETSI EN 300328 V2.2.2 (2019-07), Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum.

The objective is to determine the compliance of EUT with ETSI EN 300328 V2.2.2 (2019-07).

Test Methodology

All measurements contained in this report were conducted with ETSI EN 300328 V2.2.2 (2019-07).

Measurement Uncertainty

Parameter	Flab	Maximum allow uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$	$\pm 5 \%$
RF output power, conducted	$\pm 0.61\text{dB}$	$\pm 1,5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 2.47\text{dB}$	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 3.62\text{dB}$	$\pm 6 \text{ dB}$
Temperature	$\pm 1^\circ\text{C}$	$\pm 3^\circ\text{C}$
Supply voltages	$\pm 0.4\%$	$\pm 3 \%$
Duty Cycle	1%	$\pm 5 \%$

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.

2.4GHz WLAN, 13 channels are provided to testing.

The 802.11b, 802.11g and 802.11n-HT20 modes were tested with Channel 1, 7 and 13; 802.11n-HT40 modes were tested with Channel 3, 7 and 11.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

The extreme temperature test conditions which were declared by the manufacturer and the normal conditions are as below:

NT: Normal Temperature 25°C

LT: Low Temperature -10°C

HT: High Temperature +40°C

EUT Exercise Software

The software 'esprfTool_2.3.exe' was used for setting the EUT into engineering mode, which was provided by manufacturer and the test configured as following table▲. The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power and PSD across all data rates bandwidths, and modulations.

The models: M5-3C-86, M5-2C-86 and M5-1C-86 share the same RF circuit structure and software setting, pre-test the three models for output power, M5-3C-86 with highest power was selected for full test.

Mode	Channel	Frequency (MHz)	Data rate (Mbps)	Power level
802.11 b	Low	2412	1	4
	Middle	2442	1	4
	High	2472	1	4
802.11 g	Low	2412	6	8
	Middle	2442	6	8
	High	2472	6	8
802.11 n20	Low	2412	MCS0	8
	Middle	2442	MCS0	8
	High	2472	MCS0	8
802.11 n40	Low	2422	MCS0	8
	Middle	2442	MCS0	8

	High	2462	MCS0	8
--	------	------	------	---

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length(m)	From Port	To
/	/	/	/	/	/

Block Diagram of Test Setup

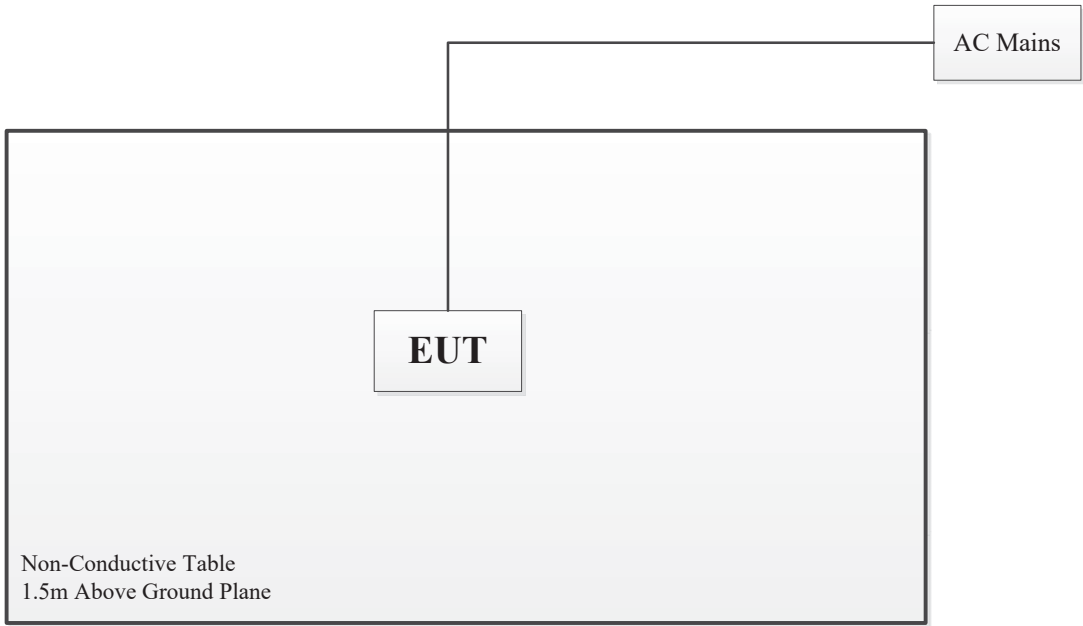

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emissions below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-23	2021-09-22
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2021-07-19	2022-07-18
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2021-07-19	2022-07-18
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2021-07-19	2022-07-18
Sonoma	Amplifier	310N	372193	2021-07-18	2022-07-17
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2021-09-04	2022-09-03
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
Radiated emissions above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Agilent	Spectrum Analyzer	E4440A	SG43360054	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2021-09-04	2022-09-03
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2021-09-04	2022-09-03
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2021-09-04	2022-09-03
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2021-06-16	2022-06-15
RF conducted					
R&S	Spectrum Analyzer	FSU 26	200160/026	2021-04-25	2022-04-24
R&S	Spectrum Analyzer	FSV40	101589	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	2021-09-04	2022-09-03
Agilent	USB Wideband Power Sensor	U2021XA	MY54080014	2021-07-22	2022-07-21
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2021-02-24	2022-02-23
narda	Attenuator	6dB	04270	2021-09-04	2022-09-03
Agilent	MXG Vector Signal Generator	N5182B	MY51350142	2021-04-25	2022-04-24
R&S	Wideband Radio Communication Tester	CMW500	147473	2020-09-23	2021-09-22

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions

Test Item:	Radiated emissions	RF conducted
Temperature:	23.7~27.5℃	26.2~27.7℃
Relative Humidity:	60~66%	56~63%
ATM Pressure:	100.3kPa	100.3~100.4kPa
Tester:	Alex Hu, Joker Chen	Rennes Guo
Test Date:	2021.09.08~2021.09.13	2021.09.08~2021.09.09

SUMMARY OF TEST RESULTS

SN	Rule and Clause	Description of Test	Test Result
1	EN 300 328 Clause 4.3.2.2	RF output power	Compliance
2	EN 300 328 Clause 4.3.2.3	Power Spectral Density	Compliance
3	EN 300 328 Clause 4.3.2.4	Duty cycle, Tx-Sequence, Tx-gap	Not applicable*
4	EN 300 328 Clause 4.3.2.5	Medium Utilisation (MU) factor	Not applicable*
5	EN 300 328 Clause 4.3.2.6	Adaptivity	Compliance
6	EN 300 328 Clause 4.3.2.7	Occupied Channel Bandwidth	Compliance
7	EN 300 328 Clause 4.3.2.8	Transmitter unwanted emissions in the out-of-band domain	Compliance
8	EN 300 328 Clause 4.3.2.9	Transmitter unwanted emissions in the spurious domain	Compliance
9	EN 300 328 Clause 4.3.2.10	Receiver spurious emissions	Compliance
10	EN 300 328 Clause 4.3.2.11	Receiver Blocking	Compliance
11	EN 300 328 Clause 4.3.2.12	Geo-location capability	Not applicable**

Note:

The applicant declared that the equipment is adaptive equipment.

Not applicable*: These requirements only apply for non-adaptive equipment.

Not applicable**: The equipment without geo-location capability.

1 – RF OUTPUT POWER

Applicable Standard

This requirement applies to all types of non-FHSS equipment.

The RF output power is defined as the mean equivalent isotropic radiated power (e.i.r.p.) of the equipment during a transmission burst.

Limit

The RF output power for non-FHSS equipment shall be equal to or less than 20 dBm.

NOTE: For Non-adaptive FHSS equipment, the manufacturer may have declared a reduced RF Output Power (see clause 5.4.1 m)) and associated Duty Cycle (see clause 5.4.1 e)) that will ensure that the equipment meets the requirement for the Medium Utilization (MU) factor further described in clause 4.3.2.5. This is verified by the conformance test referred to in clause 4.3.2.5.4.

For non-adaptive non-FHSS equipment, where the manufacturer has declared an RF output power of less than 20 dBm e.i.r.p., the RF output power shall be equal to or less than that declared value.

This limit shall apply for any combination of power level and intended antenna assembly.

Test Procedure

The test procedure shall be as follows:

Step 1:

- Use a fast power sensor with a minimum sensitivity of -40 dBm and capable of minimum 1 MS/s.
- Use the following settings:
 - Sample speed 1 MS/s or faster.
 - The samples shall represent the RMS power of the signal.
 - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) is captured.

For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

Step 2:

- For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
 - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
 - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
 - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples as the new stored data set.

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.

The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.

In case of insufficient sensitivity of the power sensor (e.g. in case of radiated measurements), the value of 30 dB may need to be reduced appropriately.

Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. The start and stop points shall be included. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with k being the total number of samples and n the actual sample number.

Step 5:

- The highest of all Pburst values (value A in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:

- Add the (stated) antenna assembly gain G in dBi of the individual antenna.
- In case of smart antenna systems operating in mode with beamforming (see clause 5.3.2.2.4), add the additional beamforming gain Y in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (Pout) shall be calculated using the formula below:
 $P_{out} = A + G + Y$
- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

Test Data

Test Result: Compliance. Please refer to following tables.

Mode	Channel	Conducted output power (dBm)			Result (dBm)			Limit (dBm)
		LT	NT	HT	LT	NT	HT	
802.11 b	Low	16.34	16.51	16.59	16.34	16.51	16.59	20
	Middle	16.17	16.23	16.4	16.17	16.23	16.4	
	High	15.93	15.86	15.78	15.93	15.86	15.78	
802.11 g	Low	14.35	14.48	14.62	14.35	14.48	14.62	
	Middle	14.28	14.17	14.2	14.28	14.17	14.2	
	High	13.91	13.91	13.99	13.91	13.91	13.99	
802.11 n20	Low	14.66	14.57	14.67	14.66	14.57	14.67	
	Middle	14.08	14.22	14.11	14.08	14.22	14.11	
	High	13.88	13.88	13.85	13.88	13.88	13.85	
802.11 n40	Low	14.01	14.16	14.32	14.01	14.16	14.32	
	Middle	13.79	13.85	14.02	13.79	13.85	14.02	
	High	13.72	13.62	13.69	13.72	13.62	13.69	

Note: The antenna gain was added into the result.

2 - POWER SPECTRAL DENSITY

Applicable Standard

This requirement applies to all types of non-FHSS equipment.

The Power Spectral Density (PSD) is the mean equivalent isotropically radiated power (e.i.r.p.) spectral density in a 1 MHz bandwidth during a transmission burst.

Limit

The maximum Power Spectral Density for non-FHSS equipment is 10 dBm per MHz.

Test Procedure

The transmitter shall be connected to a spectrum analyser and the Power Spectral Density (PSD) as defined in clause 4.3.2.3 shall be measured and recorded.

The test procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483.5 MHz
- Resolution BW: 10 kHz
- Video BW: 30 kHz
- Sweep Points: > 8 350; for spectrum analysers not supporting this number of sweep points, the frequency band may be segmented
- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: For non-continuous transmissions: $2 \times \text{Channel Occupancy Time} \times \text{number of sweep points}$
For non-continuous signals, wait for the trace to stabilize. Save the data (trace data) set to a file.
For continuous transmissions: 10 s; the sweep time may be increased further until a value where the sweep time has no impact on the RMS value of the signal.

For non-continuous signals, wait for the trace to stabilize.

Save the data (trace data) set to a file.

Step 2:

For conducted measurements on smart antenna systems using either operating mode 2 or operating mode 3 (see clause 5.3.2.2), repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains and use this as the new data set.

Step 3:

Add up the values for power for all the samples in the file using the formula below.

$$P_{Sum} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 4:

Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.3.2 and save the corrected data. The following formulas can be used:

$$C_{Corr} = P_{Sum} - P_{e.i.r.p}$$

$$P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$$

with 'n' being the actual sample number

Step 5:

Starting from the first sample $P_{Samplecorr}(n)$ (lowest frequency), add up the power (in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

Step 6:

Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to sample #101).

Step 7:

Repeat step 6 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments.

From all the recorded results, the highest value is the maximum Power Spectral Density (PSD) for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.

Test Data


Please refer to following table:

Mode	Channel	Reading (dBm/MHz)	Result (dBm/MHz)	Limit (dBm/MHz)
802.11 b	Low	7.63	7.63	10
	Middle	7.39	7.39	
	High	7.25	7.25	
802.11 g	Low	3.32	3.32	10
	Middle	2.89	2.89	
	High	2.79	2.79	
802.11 n20	Low	2.81	2.81	10
	Middle	2.29	2.29	
	High	2.14	2.14	
802.11 n40	Low	-0.55	-0.55	10
	Middle	-0.93	-0.93	
	High	-1.28	-1.28	


Note: The antenna gain was added into the result.

Please refer to following plots:


802.11 b_Low

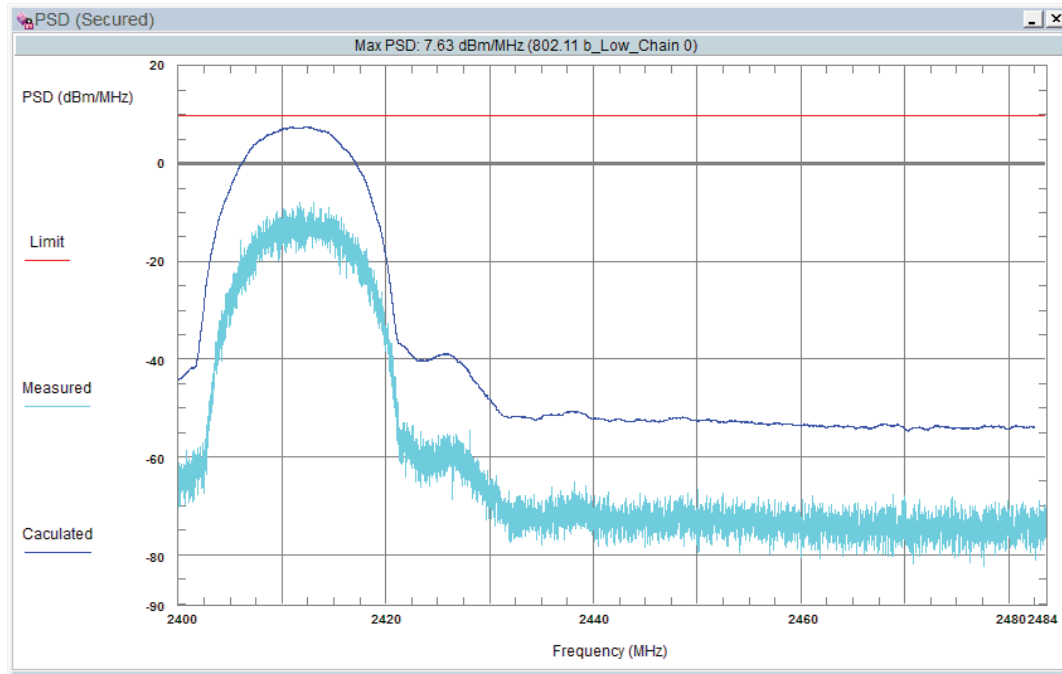


802.11 b_Middle

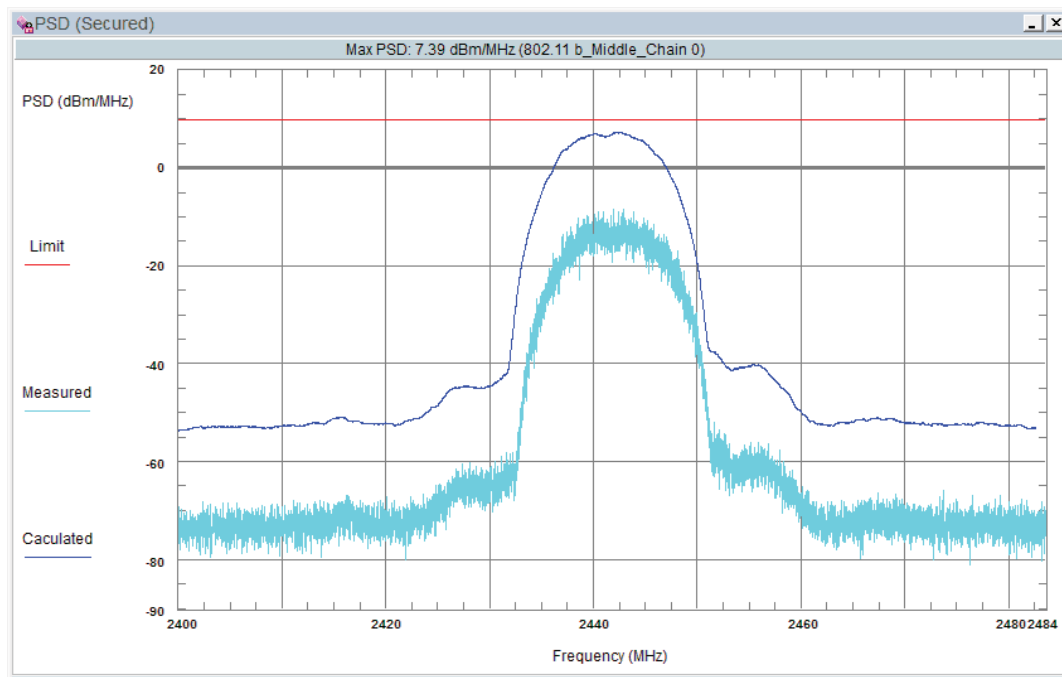


802.11 b_High

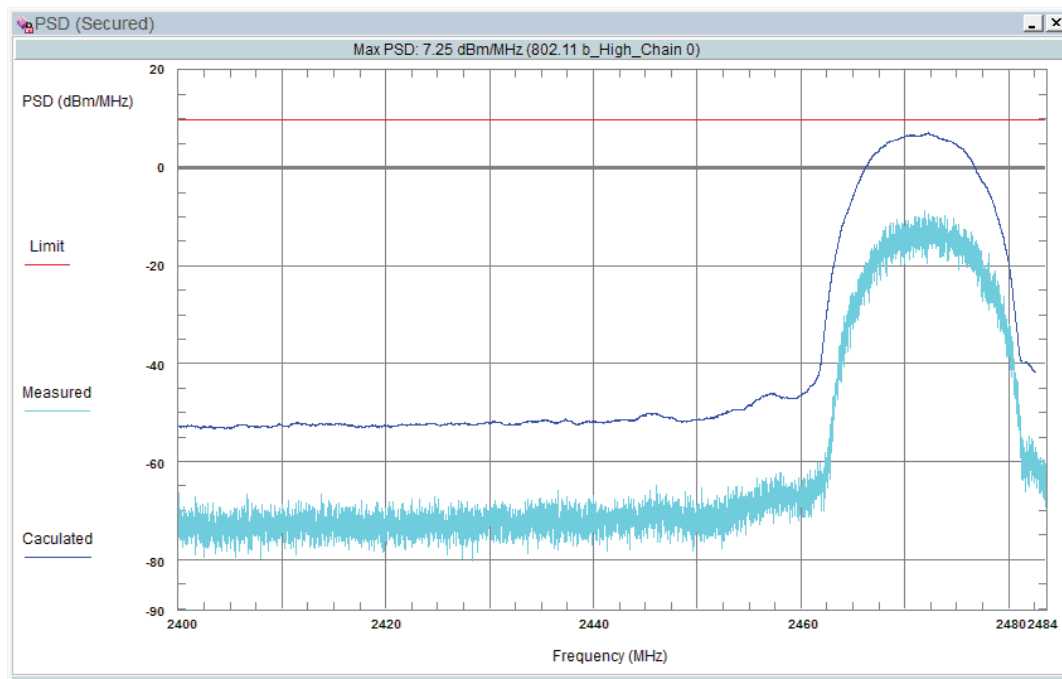


802.11 g_Low

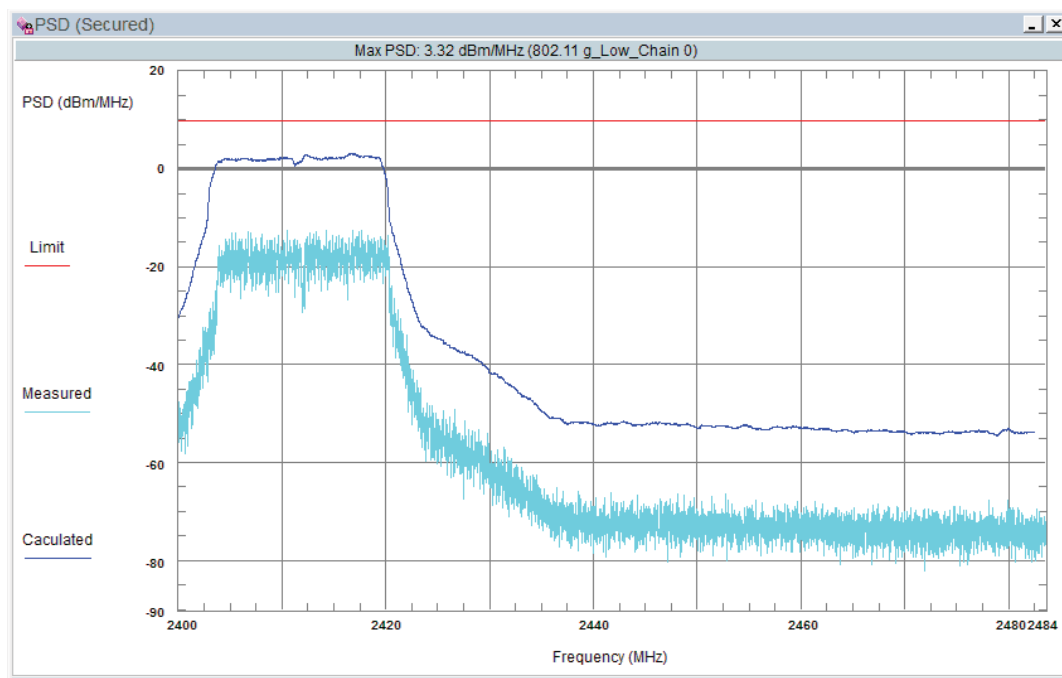


802.11 g_Middle

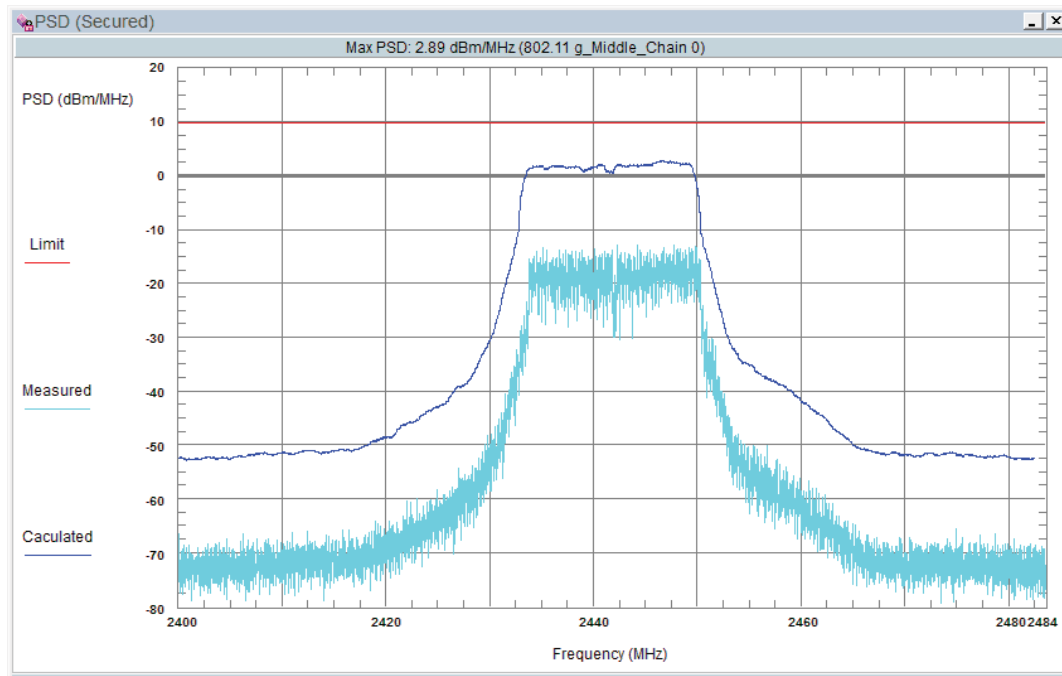


802.11 g_High

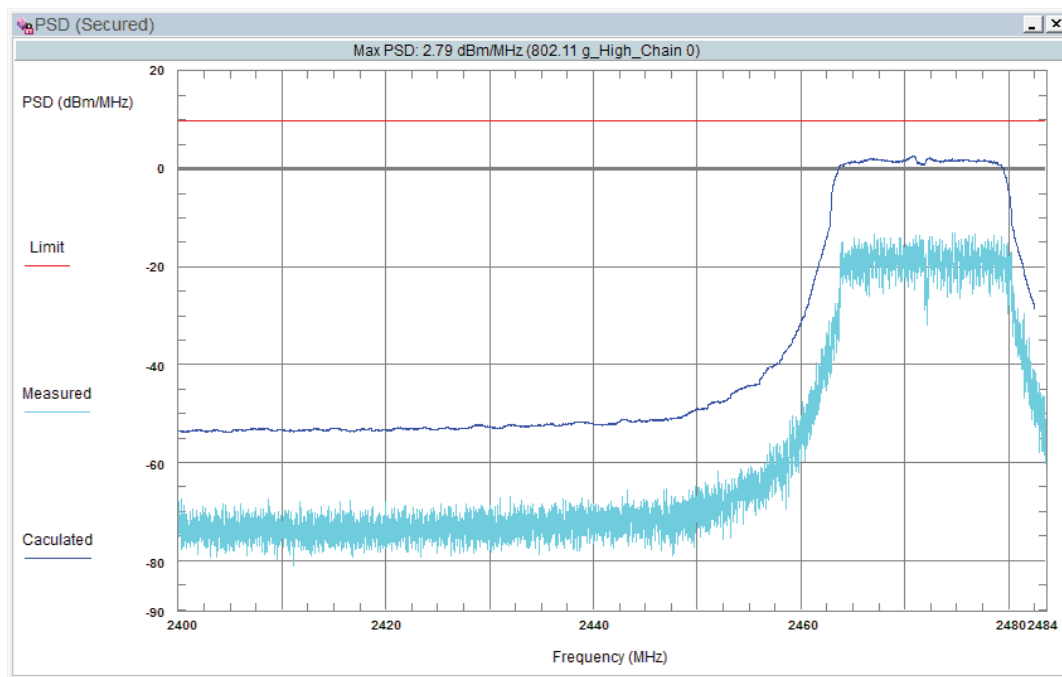


802.11 n20_Low

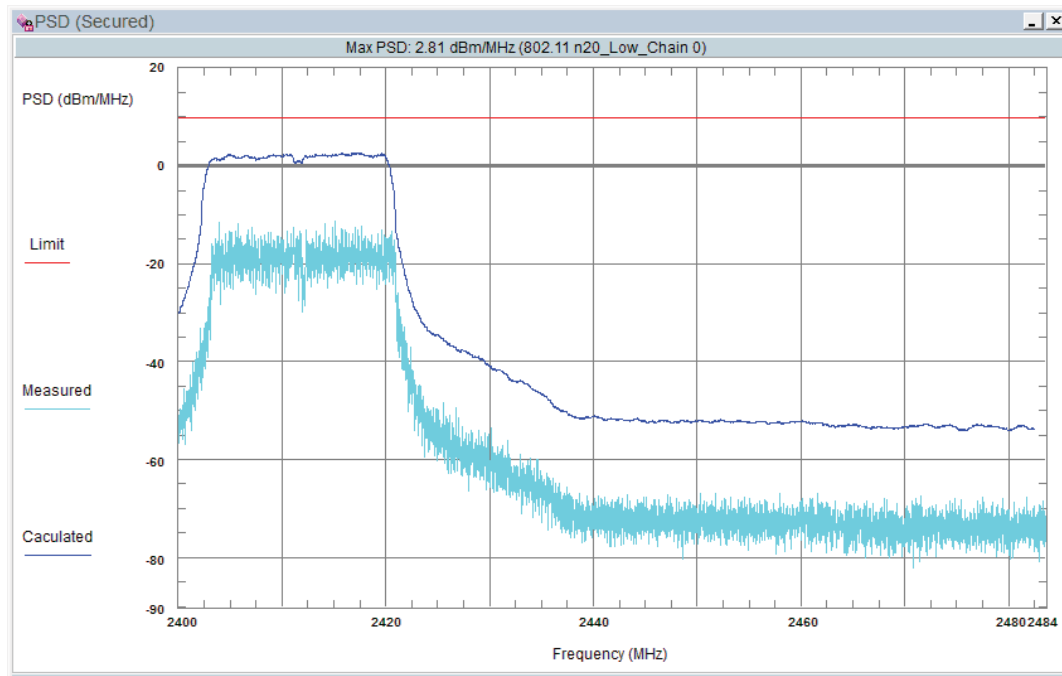


802.11 n20_Middle

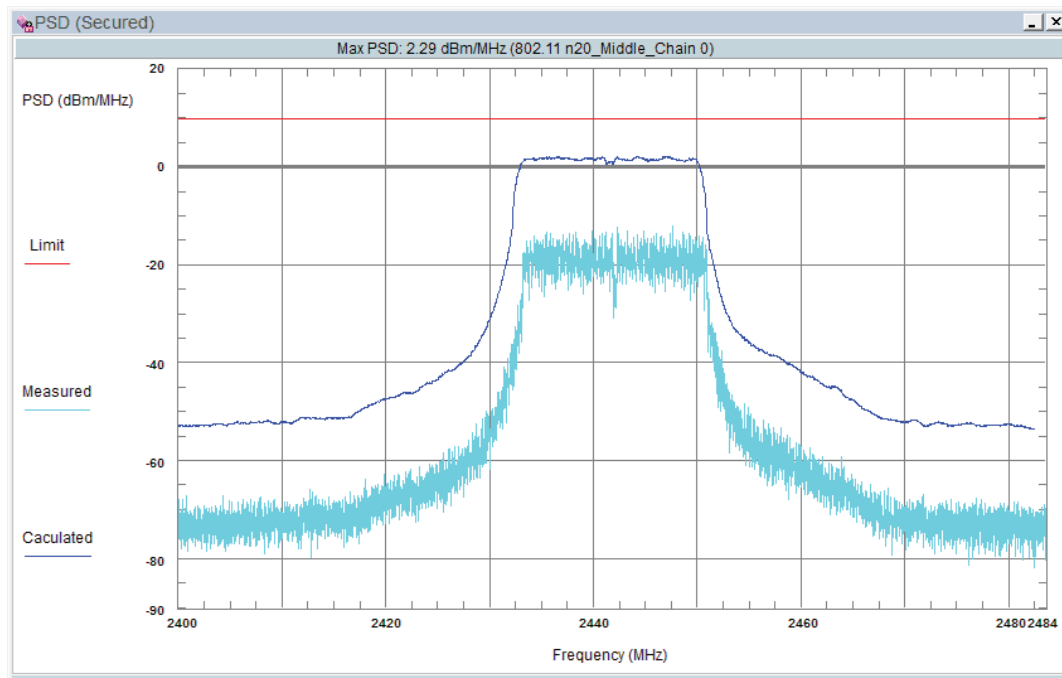


802.11 n20_High

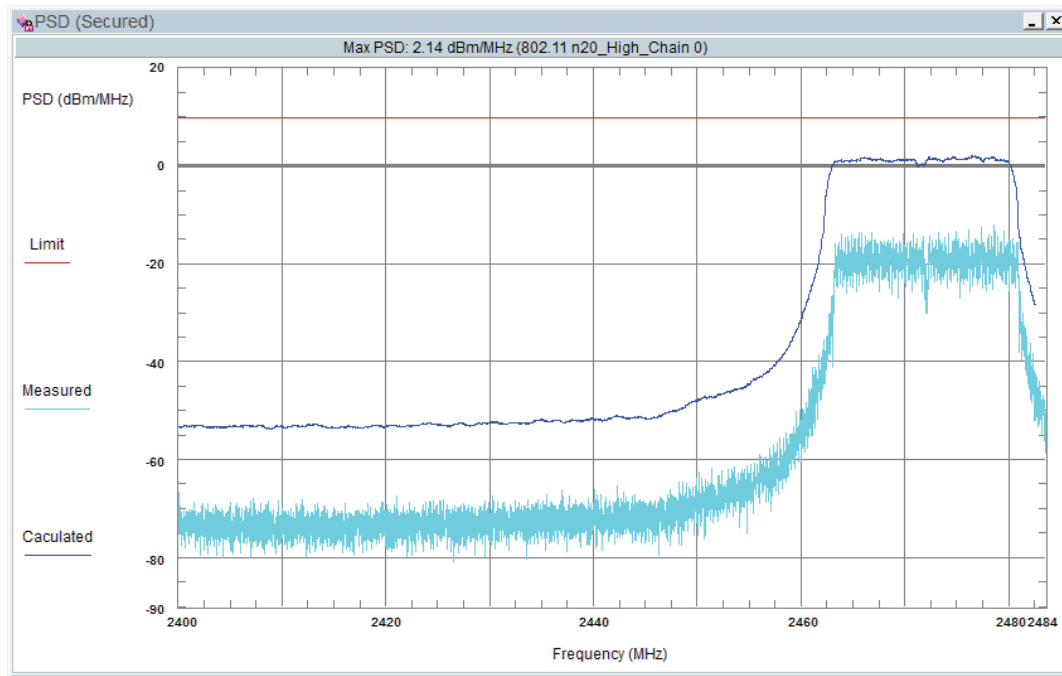


802.11 n40_Low

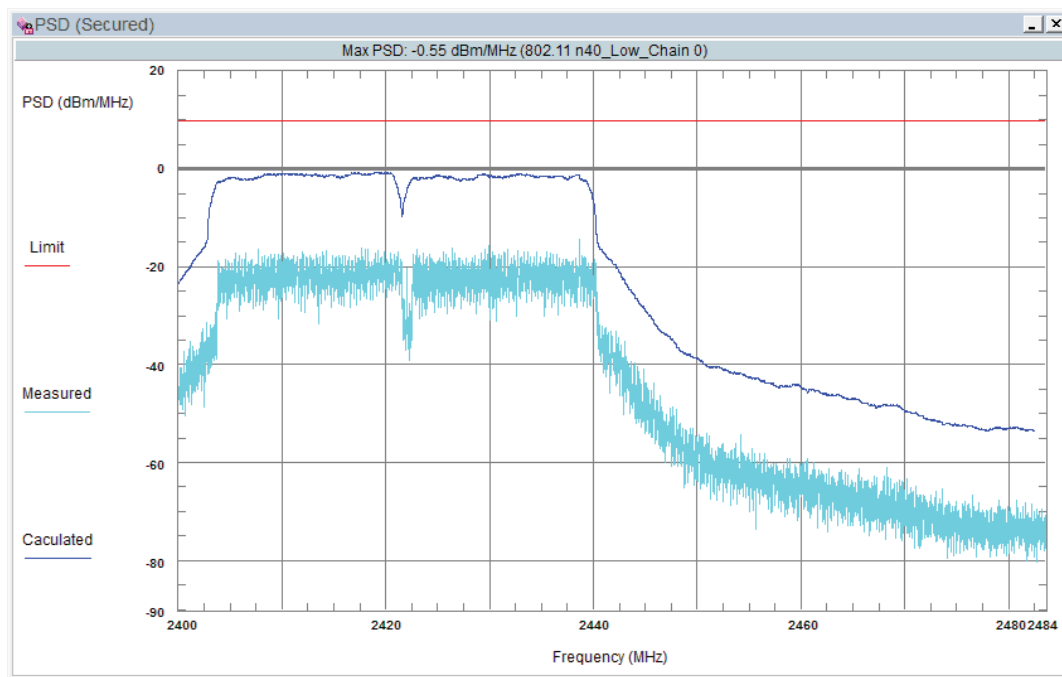

802.11 n40_Middle

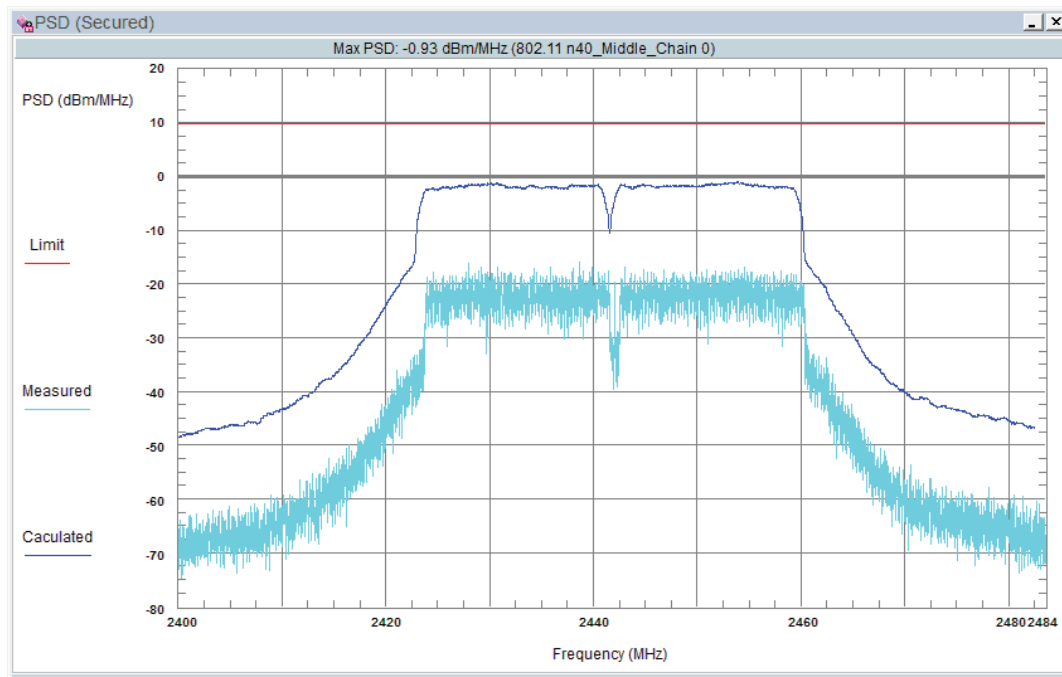

802.11 n40_High

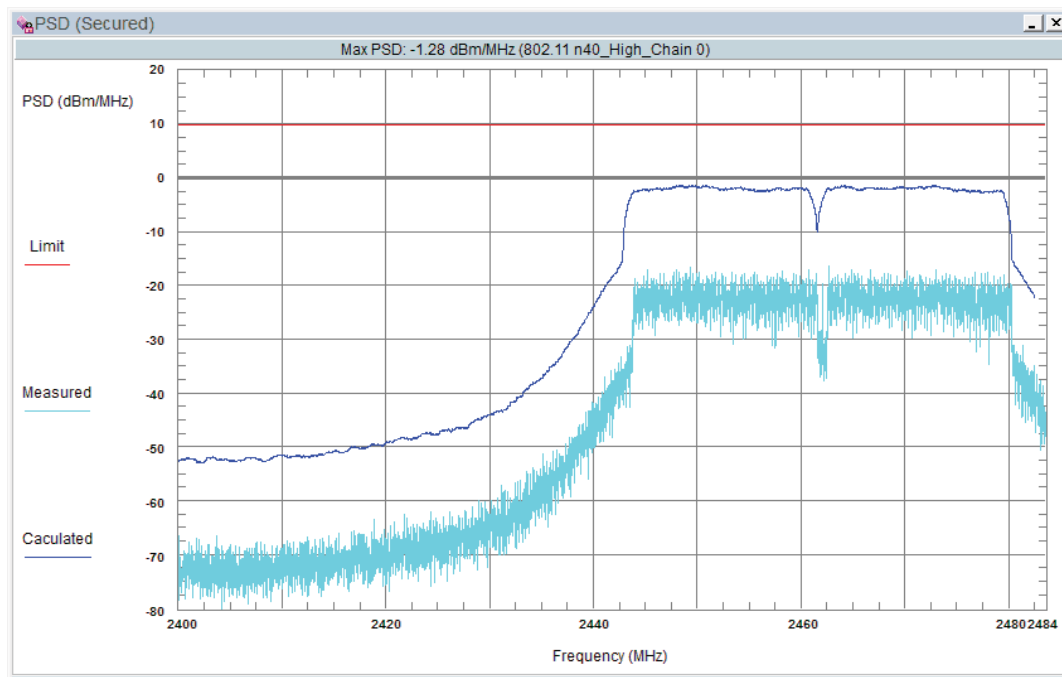

5 – Adaptivity

Applicable Standard

This requirement does not apply to non-adaptive non-FHSS equipment or adaptive non-FHSS equipment operating in a non-adaptive mode.


In addition, this requirement does not apply for non-FHSS equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. or for non-FHSS equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.

Adaptive non-FHSS equipment uses a mechanism by which it can adapt to its radio environment by identifying other transmissions present within its Occupied Channel Bandwidth.

Adaptive non-FHSS equipment shall implement either of the mechanisms provided in clause 4.3.2.6.2 or clause 4.3.2.6.3.

Adaptive non-FHSS equipment is allowed to switch dynamically between different adaptive modes.

Test Setup Block Diagram

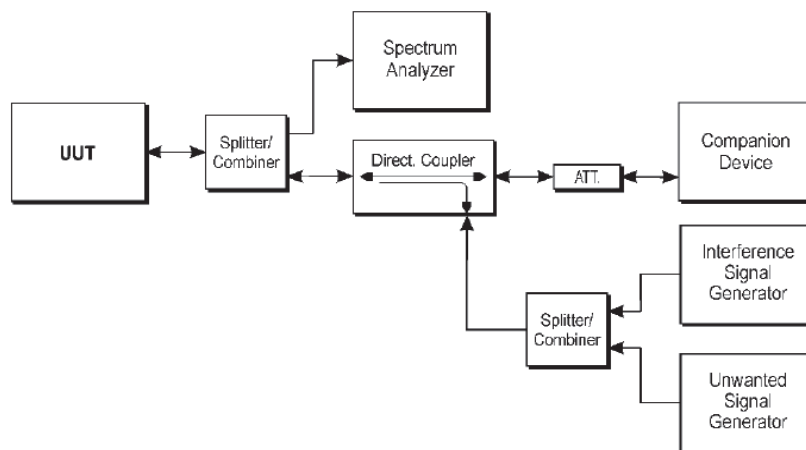

Test Procedure

The measurement procedure refer to ETSI EN 300 328 V2.2.2 (2019-07) §5.4.6.2


Test Data

Please refer to following table:

Mode	Channel	Frequency (MHz)	COT (ms)	Limit (ms)	CCA (μs)	Limit (μs)	Short control signalling transmission time (ms)	Limit (ms)
802.11 b	Low	2412	1.225	<13	19.864	≥18	0	≤5
	High	2462	1.224		19.121		0	


Please refer to following plots:

Low_CCA

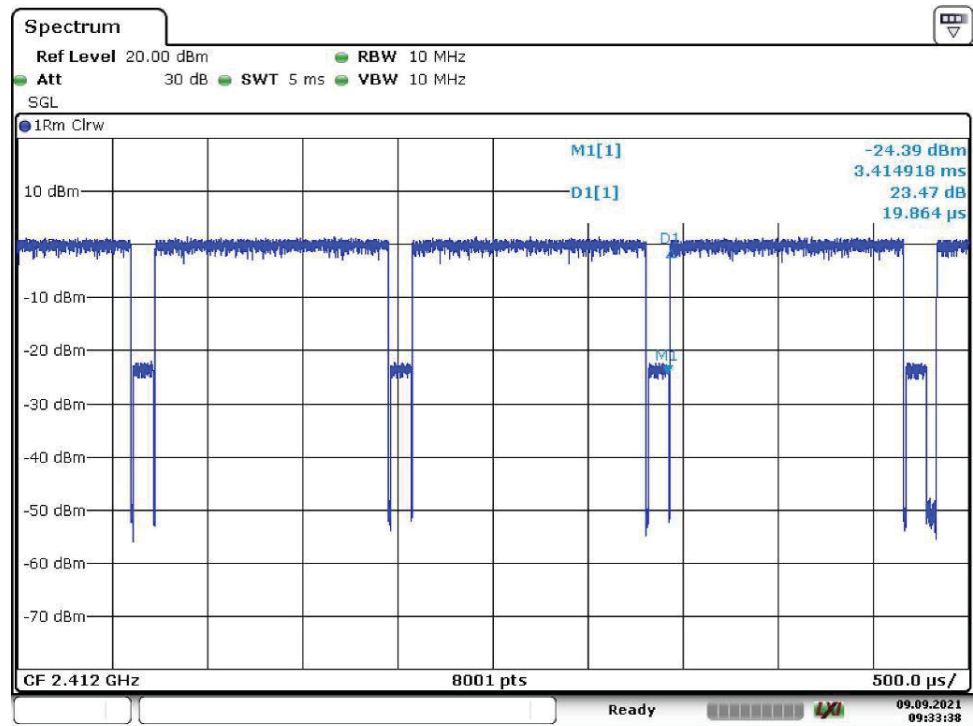


Date: 9.SEP.2021 09:33:39

Low_COT

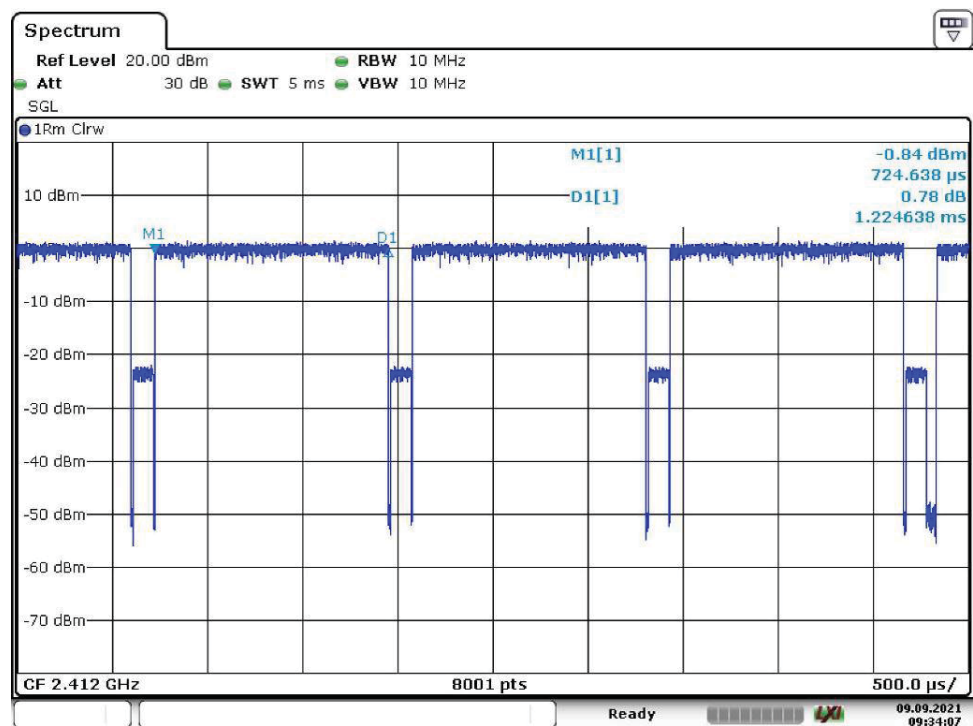


Date: 9.SEP.2021 09:34:08

High_CCA

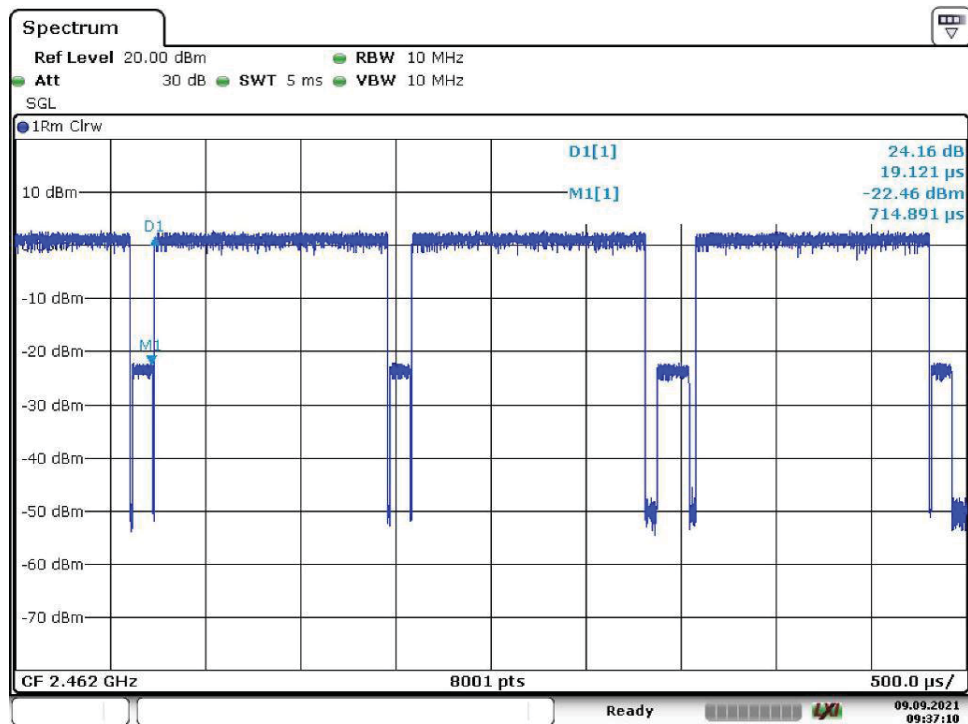


Date: 9.SEP.2021 09:37:11

High_COT

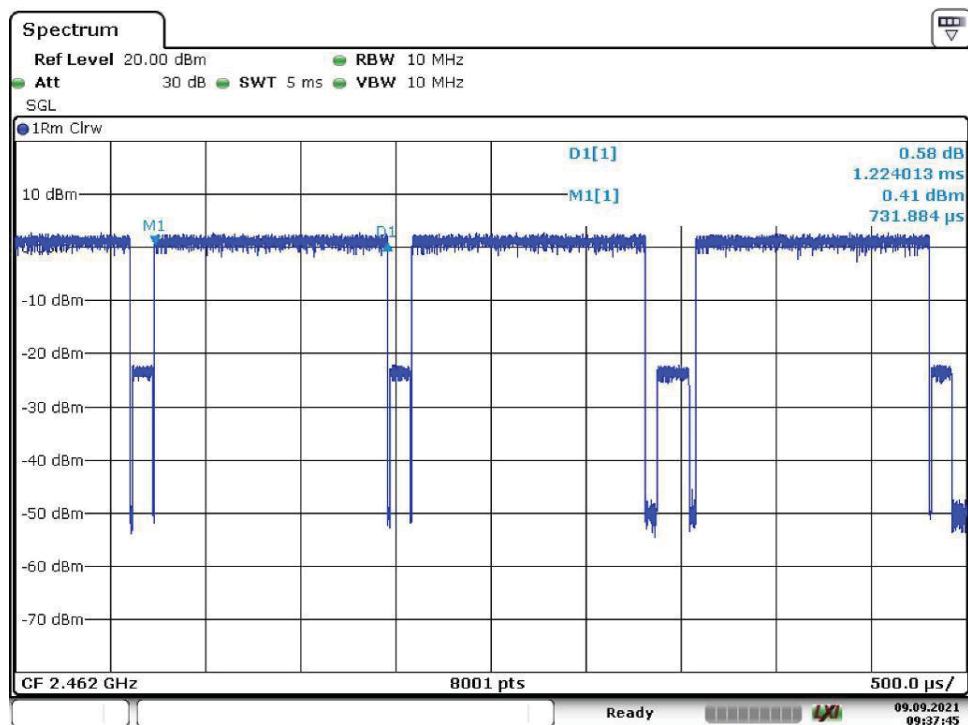


Date: 9.SEP.2021 09:37:45

Low_Adaptivity

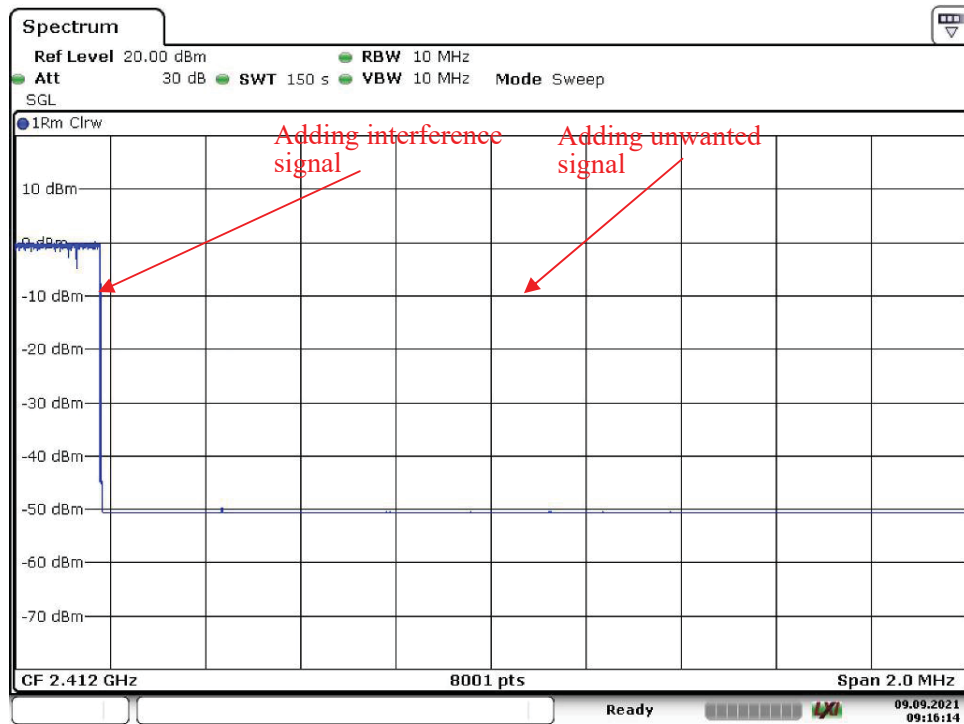

Date: 9.SEP.2021 09:16:15

High_Adaptivity

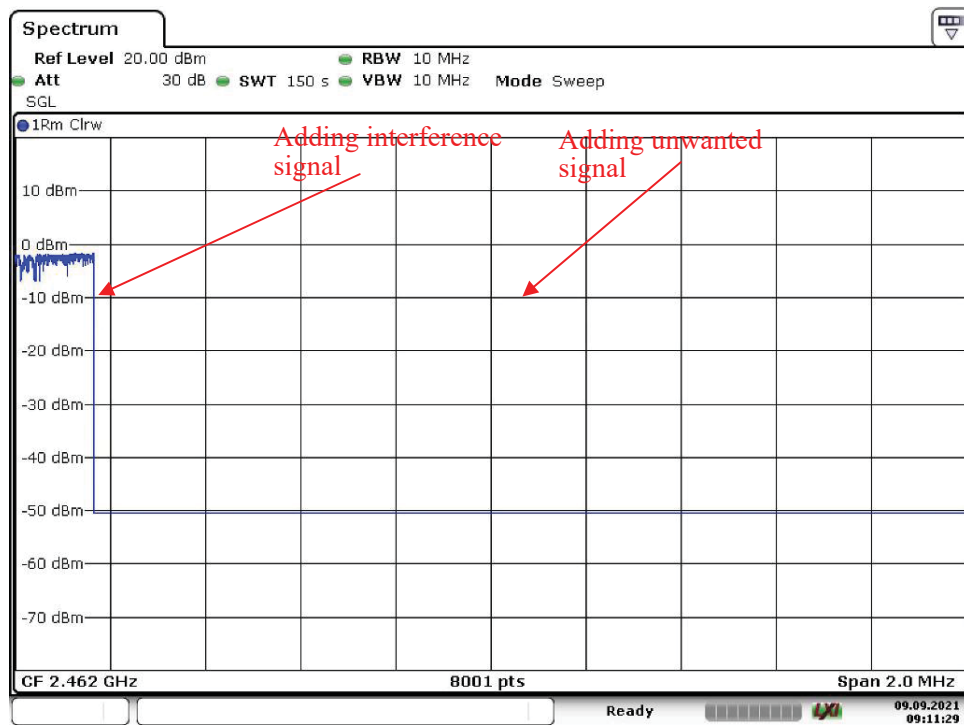

Date: 9.SEP.2021 09:11:30

6 – OCCUPIED CHANNEL BANDWIDTH

Applicable Standard

This requirement applies to all types of non-FHSS equipment.

The Occupied Channel Bandwidth is the bandwidth that contains 99 % of the power of the signal.

Limit

The Occupied Channel Bandwidth shall be within the band given in table 1.

In addition, for non-adaptive non-FHSS equipment with e.i.r.p. greater than 10 dBm, the Occupied Channel Bandwidth shall be equal to or less than 20 MHz.

Test Procedure

The measurement procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW: $3 \times \text{RBW}$
- Frequency Span: $2 \times \text{Nominal Channel Bandwidth}$
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

Step 2:

Wait for the trace to stabilize.

Find the peak value of the trace and place the analyser marker on this peak.

Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT.

Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.


Test Data

Please refer to following table:

Mode	Channel	Frequency (MHz)	Result (MHz)
802.11 b	Low	2412	13.200
	High	2472	13.200
802.11 g	Low	2412	16.880
	High	2472	16.880
802.11 n20	Low	2412	17.920
	High	2472	17.920
802.11 n40	Low	2422	36.960
	High	2462	36.960


Please refer to following plots:

802.11 b_Low

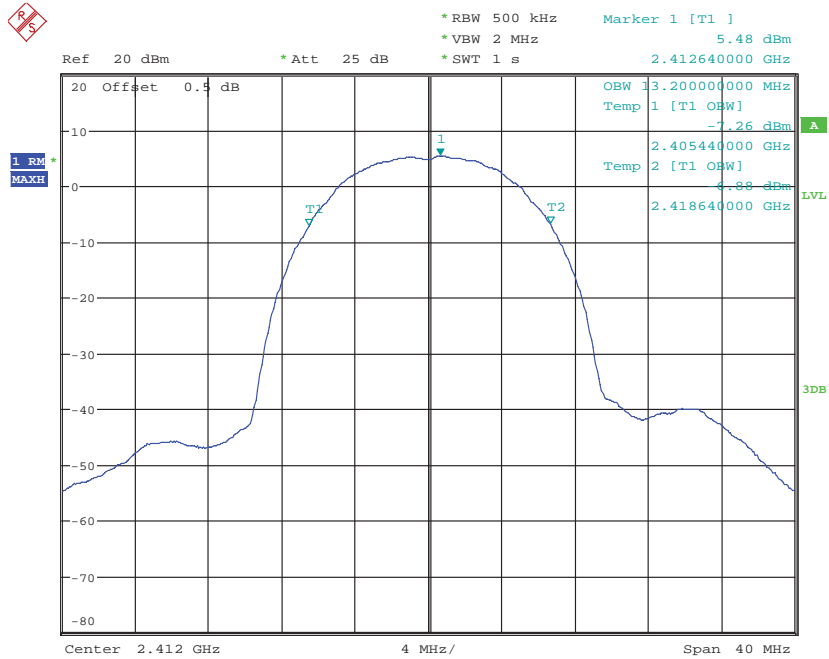


Date: 8.SEP.2021 15:48:47

802.11 b_High

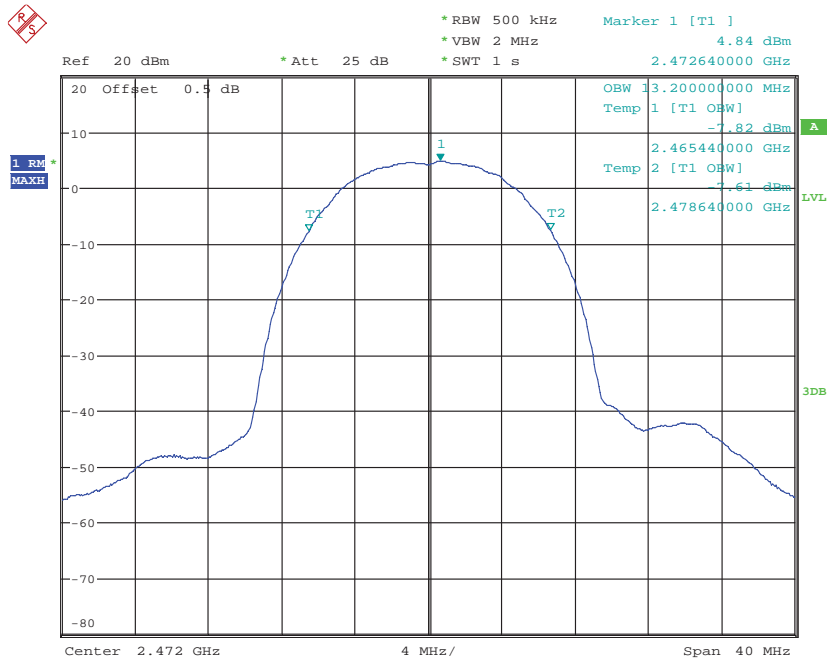


Date: 8.SEP.2021 15:49:59

802.11 g_Low

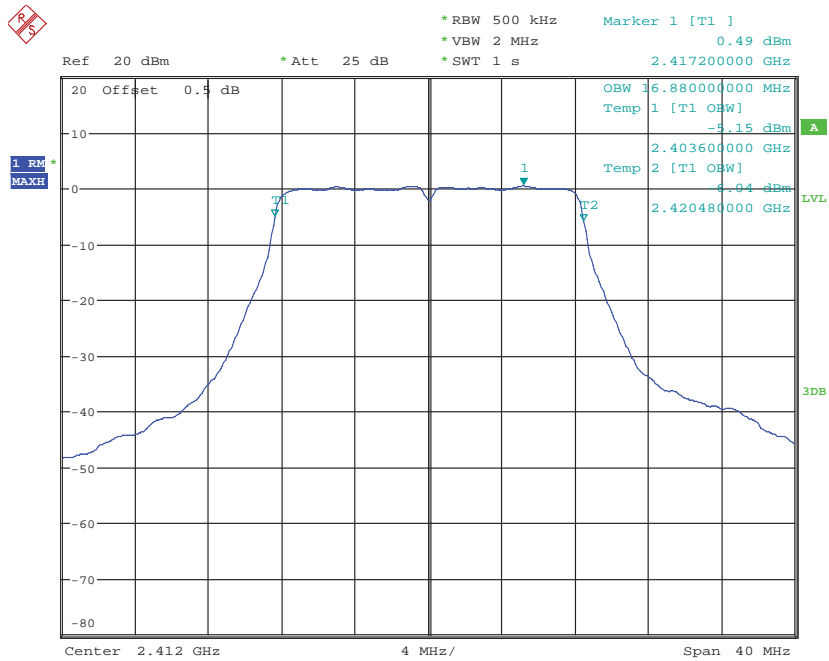


Date: 8.SEP.2021 15:52:59

802.11 g_High

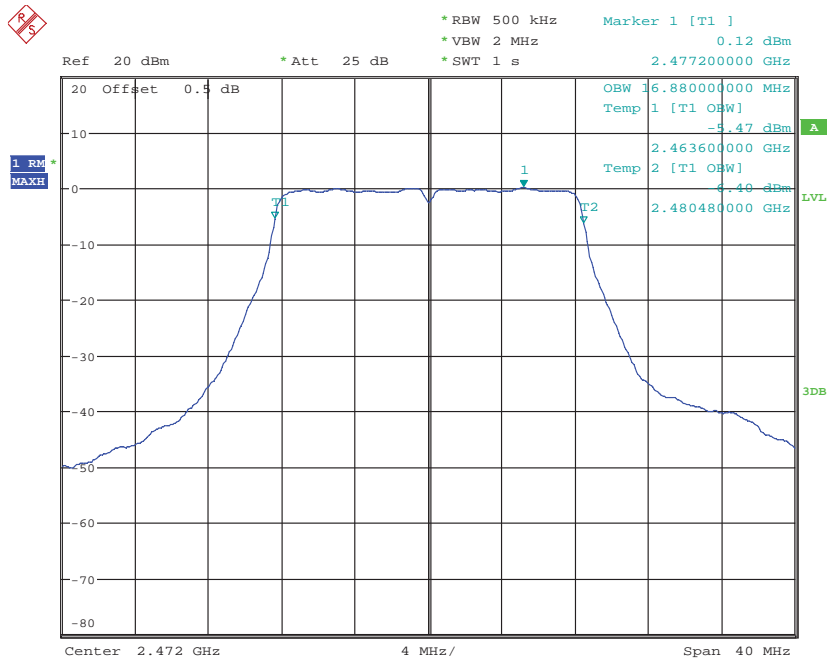


Date: 8.SEP.2021 15:51:24

802.11 n20_Low

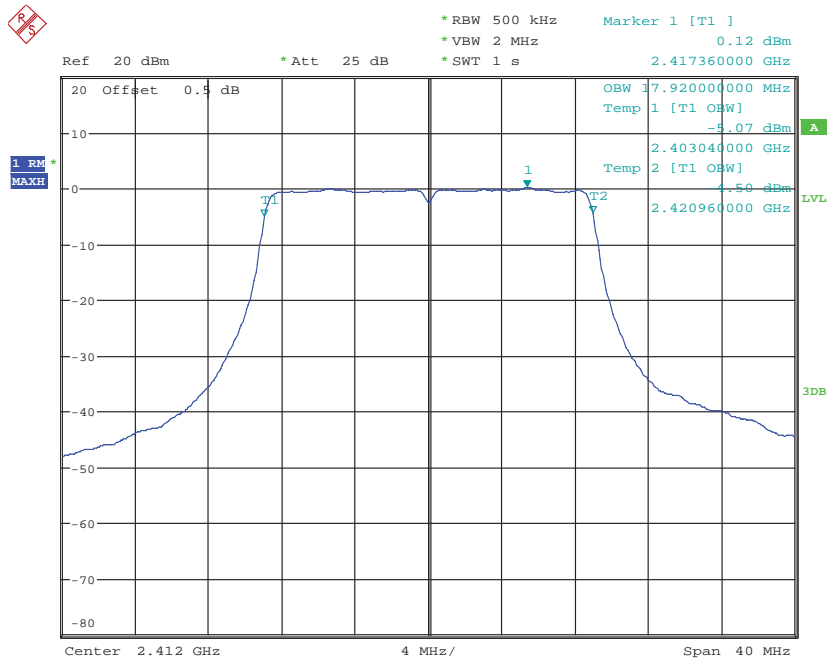


Date: 8.SEP.2021 15:54:37

802.11 n20_High

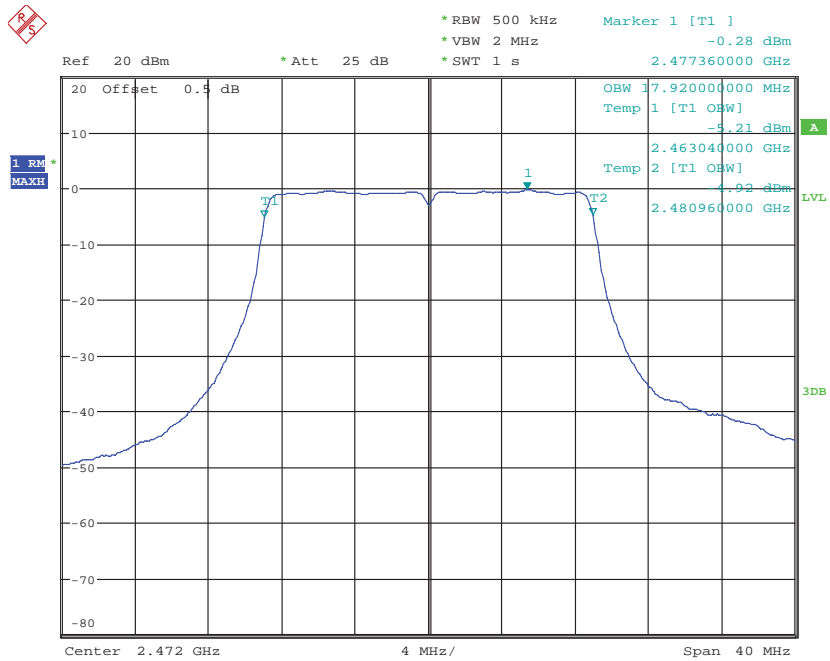


Date: 8.SEP.2021 15:56:18

802.11 n40_Low

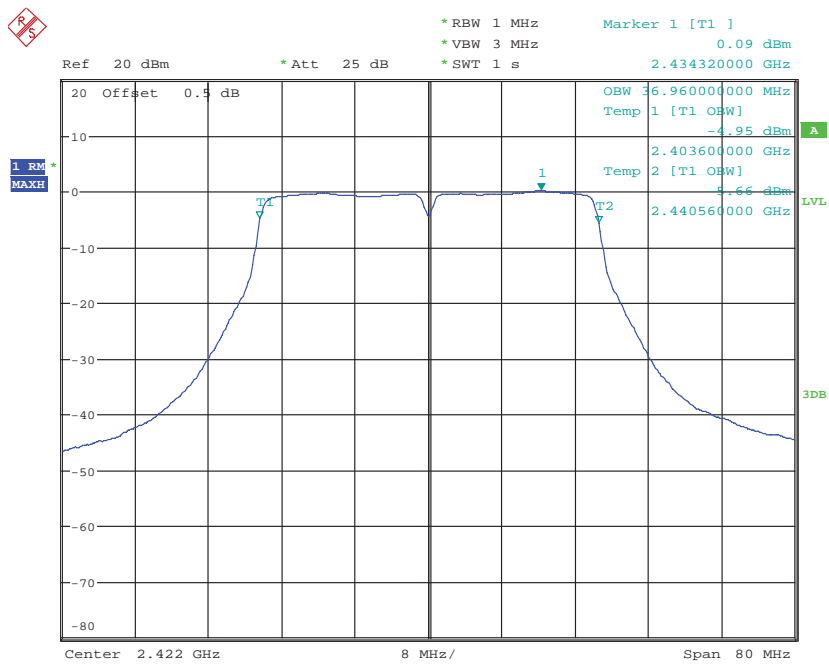

Date: 8.SEP.2021 16:00:30

802.11 n40_High

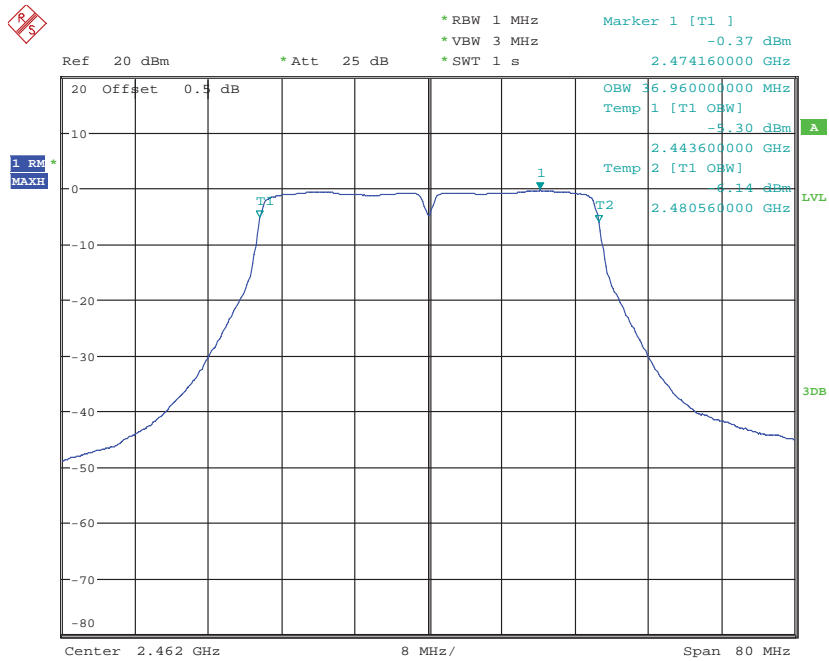

Date: 8.SEP.2021 15:57:54

7 – TRANSMITTER UNWANTED EMISSION IN THE OUT-OF-BAND DOMAIN

Applicable Standard

This requirement applies to all types of non-FHSS equipment.

In the present document, transmitter unwanted emissions in the out-of-band domain are emissions when the equipment is in Transmit mode, on frequencies immediately outside the allocated band, but excluding unwanted emissions in the spurious domain.

Limit

The transmitter unwanted emissions in the out-of-band domain shall not exceed the values provided by the mask in figure 3.

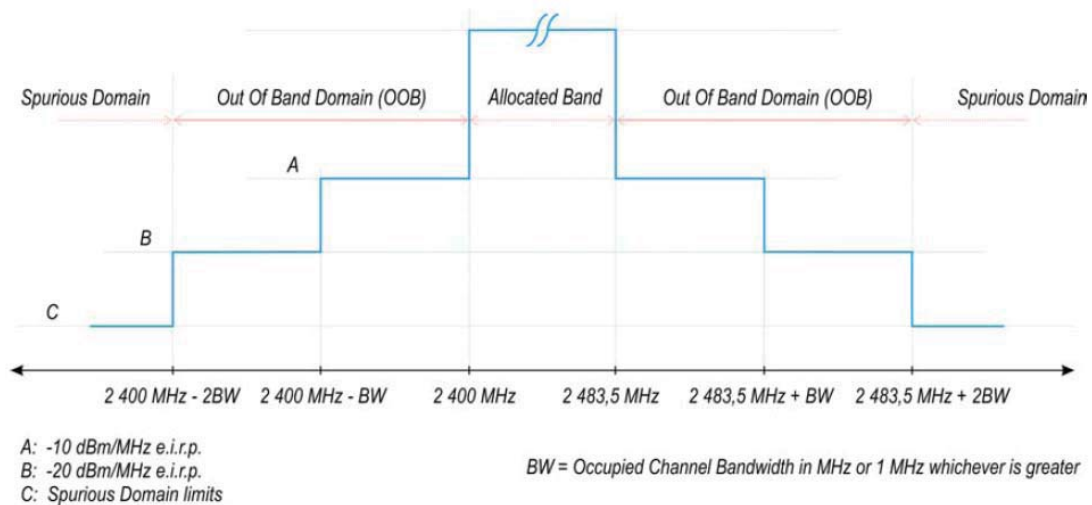


Figure 3: Transmit mask

Test Procedure

According to ETSI EN 300328 V2.2.2 (2019 -07) §5.4.8.2

Test Data

Please refer to following table:

Mode	Channel	Frequency Segment	Reading (dBm/MHz)	Result (dBm/MHz)	Limit (dBm/MHz)
802.11 b	Low	2400MHz-2BW~2400-BW	-51.53	-51.53	-20
		2400MHz-BW~2400MHz	-43.45	-43.45	-10
	High	2483.5MHz~2483.5MHz+BW	-39.95	-39.95	-10
		2483.5MHz+BW~2483.5MHz+2BW	-51.65	-51.65	-20
802.11 g	Low	2400MHz-2BW~2400-BW	-51.99	-51.99	-20
		2400MHz-BW~2400MHz	-34.03	-34.03	-10
	High	2483.5MHz~2483.5MHz+BW	-32.84	-32.84	-10
		2483.5MHz+BW~2483.5MHz+2BW	-52.20	-52.2	-20
802.11 n20	Low	2400MHz-2BW~2400-BW	-52.26	-52.26	-20
		2400MHz-BW~2400MHz	-34.77	-34.77	-10
	High	2483.5MHz~2483.5MHz+BW	-33.18	-33.18	-10
		2483.5MHz+BW~2483.5MHz+2BW	-52.11	-52.11	-20
802.11 n40	Low	2400MHz-2BW~2400-BW	-52.85	-52.85	-20
		2400MHz-BW~2400MHz	-25.83	-25.83	-10
	High	2483.5MHz~2483.5MHz+BW	-24.43	-24.43	-10
		2483.5MHz+BW~2483.5MHz+2BW	-52.40	-52.4	-20

Note: The antenna gain was added into the result.

8 – TRANSMITTER UNWANTED EMISSION IN THE SPURIOUS DOMAIN

Applicable Standard

This requirement applies to all types of non-FHSS equipment.

In the present document, transmitter unwanted emissions in the spurious domain are emissions outside the allocated band and outside the Out-of-band Domain as indicated in figure 3 when the equipment is in Transmit mode.

Limit

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table 12.

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

Table 12 Transmitter limits for spurious emissions

Frequency Range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

NOTE: In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted) and to the emissions radiated by the cabinet. In case of integral antenna equipment (without temporary antenna connectors), these limits apply to emissions radiated by the equipment.

Test Procedure

According to ETSI EN 300328 V2.2.2 (2019 -07) §5.4.9.2

Test Data

Pre-scan test model M5-3C-86, M5-2C-86, M5-1C-86, the test result was similar, the worst case please refer to following table:

802.11 b low channel			2412 MHz					
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4824.00	H	49.64	-44.51	10.99	1.45	-34.97	-30.00	4.97
4824.00	V	50.01	-44.02	10.99	1.45	-34.48	-30.00	4.48
7236.00	H	39.76	-49.99	11.06	1.91	-40.84	-30.00	10.84
7236.00	V	38.93	-51.10	11.06	1.91	-41.95	-30.00	11.95
2555.70	H	48.97	-51.23	9.49	1.01	-42.75	-30.00	12.75
2532.60	V	43.74	-56.62	9.45	1.01	-48.18	-30.00	18.18
57.40	H	51.52	-51.58	-11.50	0.14	-63.22	-54.00	9.22
57.40	V	54.28	-50.49	-11.50	0.14	-62.13	-54.00	8.13

802.11 b high channel			2472 MHz					
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4944.00	H	43.37	-49.90	11.13	1.50	-40.27	-30.00	10.27
4944.00	V	45.71	-47.57	11.13	1.50	-37.94	-30.00	7.94
7416.00	H	40.28	-49.44	10.95	2.03	-40.52	-30.00	10.52
7416.00	V	40.22	-50.22	10.95	2.03	-41.30	-30.00	11.30
2526.80	H	45.60	-54.84	9.44	1.01	-46.41	-30.00	16.41
2547.00	V	42.35	-57.87	9.48	1.01	-49.40	-30.00	19.40
57.40	H	50.28	-52.82	-11.50	0.14	-64.46	-54.00	10.46
57.40	V	53.82	-50.95	-11.50	0.14	-62.59	-54.00	8.59

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

9 – RECEIVER SPURIOUS EMISSIONS

Applicable Standard

This requirement applies to all types of non-FHSS equipment.

Receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

Limit

The spurious emissions of the receiver shall not exceed the values given in table 13.

In case of non-FHSS equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or for emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Table 13

Frequency Range	Maximum power	Measurement Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47 dBm	1 MHz

NOTE: In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted) and to the emissions radiated by the cabinet. In case of integral antenna equipment (without temporary antenna connectors), these limits apply to emissions radiated by the equipment.

Test Procedure

According to ETSI EN 300328 V2.2.2 (2019 -07) §5.4.10.2

Test Data

Pre-scan test model M5-3C-86, M5-2C-86, M5-1C-86, the test result was similar, the worst case please refer to following table:

802.11 b low channel**2412 MHz**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
3312.00	H	34.87	-61.30	10.32	1.15	-52.13	-47.00	5.13
3312.00	V	33.77	-62.19	10.32	1.15	-53.02	-47.00	6.02
57.40	H	50.97	-52.13	-11.50	0.14	-63.77	-57.00	6.77
57.40	V	45.07	-59.70	-11.50	0.14	-71.34	-57.00	14.34

802.11 b high channel**2472 MHz**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
3296.00	H	35.83	-60.27	10.32	1.15	-51.10	-47.00	4.10
3296.00	V	34.28	-61.58	10.32	1.15	-52.41	-47.00	5.41
57.40	H	50.45	-52.65	-11.50	0.14	-64.29	-57.00	7.29
57.40	V	44.59	-60.18	-11.50	0.14	-71.82	-57.00	14.82

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

10 - RECEIVER BLOCKING

Applicable Standard

This requirement applies to all types of non-FHSS equipment.

Receiver blocking is a measure of the ability of the equipment to receive a wanted signal on its operating channel without exceeding a given degradation due to the presence of an unwanted input signal (blocking signal) at frequencies other than those of the operating band and spurious responses.

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

Limit

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 14, table 15 or table 16.

Table 14: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 26 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 20 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Table 15: Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

Table 16: Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

Test Setup Block diagram

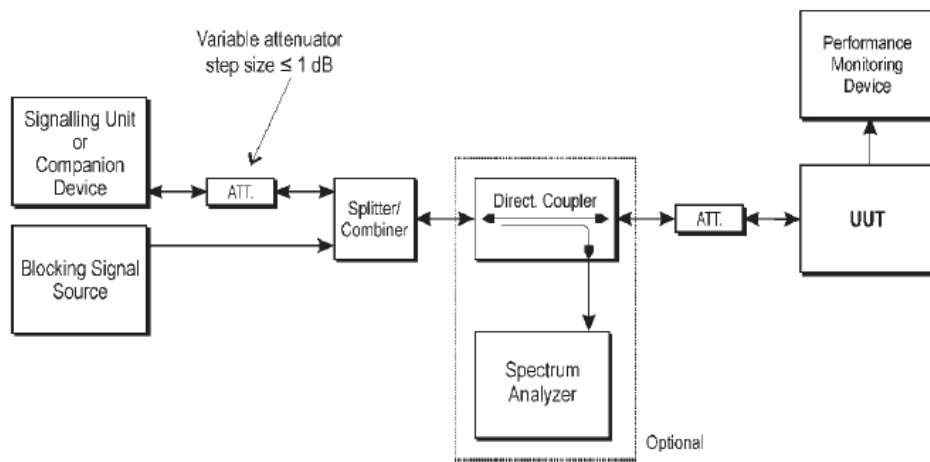


Figure 6: Test Set-up for receiver blocking

Test Procedure

The measurement procedure refer to ETSI EN 300328 V2.2.2 (2019 -07) §5.4.11.2.1

Test Data

Please refer to following table:

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Blocking Signal Frequency (MHz)	PER (%)	Limit (%)
802.11b	Low	2412	1	2380	1.26	≤10
				2300	1.36	
				2330	1.32	
				2360	1.24	
	High	2472	1	2504	1.33	≤10
				2524	1.35	
				2584	1.34	
				2674	1.31	

Note: EIRP is higher than 10dBm, and it is adaptive device, so it is belong to category 1.

**EXHIBIT A - E.2 INFORMATION AS REQUIRED BY EN 300 328 V2.2.2,
CLAUSE 5.4.1**

In accordance with EN 300 328, clause 5.4.1, the following information is provided by the supplier.

a) The type of modulation used by the equipment:

- ☐ FHSS
☒ other forms of modulation

b) In case of FHSS modulation:

In case of non-Adaptive Frequency Hopping equipment:

The number of Hopping Frequencies: _____.

In case of Adaptive Frequency Hopping Equipment:

The maximum number of Hopping Frequencies: _____;

The minimum number of Hopping Frequencies: _____;

The (average) Dwell Time: _____;

c) Adaptive / non-adaptive equipment:

- ☐ non-adaptive Equipment
☒ adaptive Equipment without the possibility to switch to a non-adaptive mode
☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The Channel Occupancy Time implemented by the equipment: 1.225 ms

- ☐ The equipment has implemented an LBT based DAA mechanism

In case of equipment using modulation different from FHSS:

- ☐ The equipment is Frame Based equipment
☒ The equipment is Load Based equipment
☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment: 19.121 µs

- ☐ The equipment has implemented a non-LBT based DAA mechanism
☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.): _____ dBm

The maximum (corresponding) Duty Cycle: _____ %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

_____.

f) The worst case operational mode for each of the following tests:

RF Output Power: 16.59 dBm;
 Power Spectral Density 7.63 dBm/MHz;
 Duty cycle, Tx-Sequence, Tx-gap N/A;
 Accumulated Transmit Time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)
N/A;
 Hopping Frequency Separation (only for FHSS equipment) N/A;
 Medium Utilisation N/A;
 Adaptivity Pass;
 Receiver Blocking Pass;
 Nominal Occupied Channel Bandwidth 20&40 MHz;
 Transmitter unwanted emissions in the OOB domain -24.43 dBm/MHz;
 Transmitter unwanted emissions in the spurious domain -34.48dBm;
 Receiver spurious emissions -51.10 dBm;

g) The different transmit operating modes (tick all that apply):

- ☒ Operating mode 1: Single Antenna Equipment
☒ Equipment with only 1 antenna
☐ Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
☐ Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used.
 (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
- ☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
 Note: Add more lines if more channel bandwidths are supported.
- ☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
 Note: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

The number of Receive chains: _____;
 The number of Transmit chains: _____;

- ☐ symmetrical power distribution
☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain: _____;

Note: Beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

Operating Frequency Range 1: 2412 MHz to 2472 MHz
 Operating Frequency Range 2: 2422 MHz to 2462 MHz

Note: Add more lines if more Frequency Ranges are supported.

j) Nominal Channel Bandwidth(s):

Nominal Channel Bandwidth 1: 20 MHz
Nominal Channel Bandwidth 2: 40 MHz

Note: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

- ☒ Stand-alone
☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
☐ Plug-in radio device (Equipment intended for a variety of host systems)
☐ Other _____;

l) The normal and the extreme operating conditions that apply to the equipment:**Normal operating conditions (if applicable):**

Operating temperature range: +25 °C
Other (please specify if applicable): _____

Extreme operating conditions:

Operating temperature range: Minimum: -10 °C Maximum +40 °C
Other (please specify if applicable): _____ Minimum: _____ Maximum _____

Details provided are for the: ☒ stand-alone equipment
☐ combined (or host) equipment
☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

Antenna Type:

- ☒ Integral Antenna (information to be provided in case of conducted measurements)

Antenna Gain▲: 0 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): _____ dB

- ☐ Temporary RF connector provided
☐ No temporary RF connector provided

☐ Dedicated Antennas (equipment with antenna connector)
☐ Single power level with corresponding antenna(s)
☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels: _____;
Power Level 1: _____ dBm
Power Level 2: _____ dBm
Power Level 3: _____ dBm

Note 1: Add more lines in case the equipment has more power levels.

Note 2: These power levels are conducted power levels (at antenna connector).

For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: _____dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Note 3: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: _____dBm

_Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Note 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: _____dBm

_Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Note 5: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ☒ stand-alone equipment
☐ combined (or host) equipment
☐ test jig

Supply Voltage ☒ AC mains State AC voltage 230 V
☐ DC State DC voltage _____ V

In case of DC, indicate the type of power source

- ☐ Internal Power Supply
☐ External Power Supply or AC/DC adapter
☐ Battery
☐ Other: _____.

o) Describe the test modes available which can facilitate testing:

The measurements shall be performed during continuously transmitting.

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™, IEEE 802.15.4™, proprietary, etc.):

IEEE 802.11™.

q) If applicable, the statistical analysis referred to in clause 5.4.1 q)

(to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r)

(to be provided as separate attachment)

s) Geo-location capability supported by the equipment:

☐ Yes

☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.

☒ No

EXHIBIT B - EUT PHOTOGRAPHS

For photos in this section, please refer to report No.: DG1210901-45614E-02 EXHIBIT A.


EXHIBIT C – TEST SETUP PHOTOGRAPHS

Radiated Emissions

Radiated Emissions Below 1GHz View



Radiated Emissions Above 1GHz View

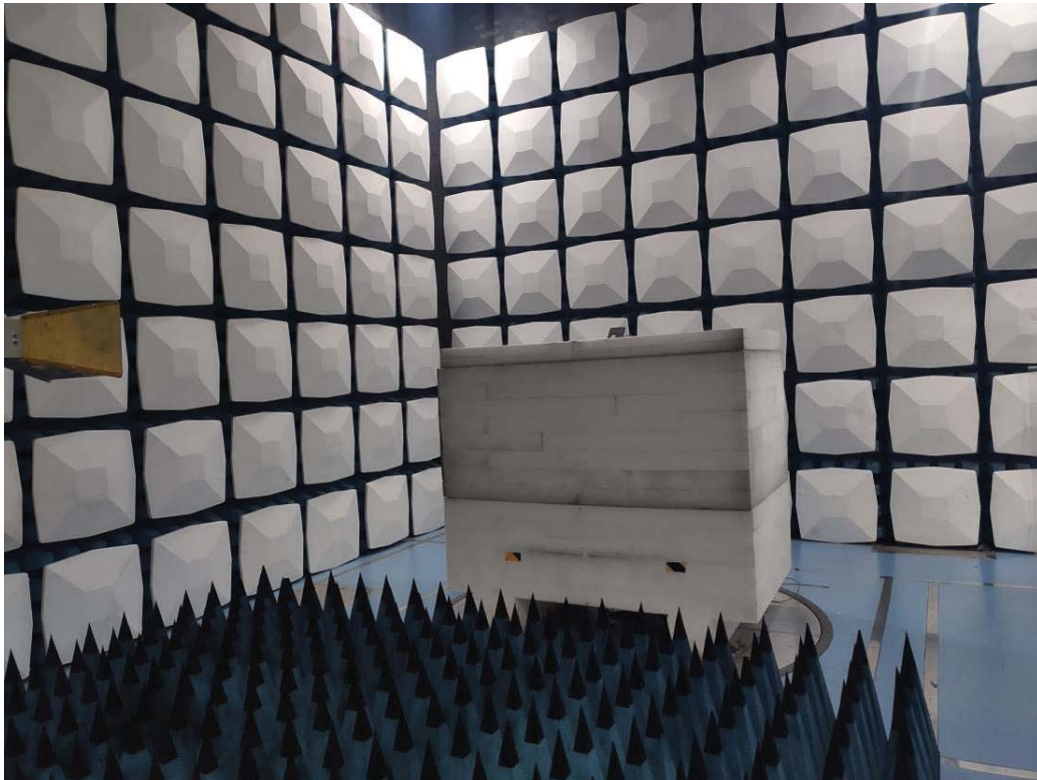

*****END OF REPORT*****